

Витрины холодильные для кондитерских изделий и деликатесов CUBE

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: usi@nt-rt.ru || сайт: <https://unis.nt-rt.ru/>

Cube II

An elegant showcase for desserts, sweets, ideal for pastry shops, bakeries, shops, restaurants, gas stations and the like. The range is also supplemented with a 90° cooling corner or a 45° neutral corner, so it is possible to assemble complete lines and sets according to the customers' wishes from the showcases offered.

- Serve over
- Double outer tempered glass
- Tempered glass shelves
- LED lighting of the exhibition area
- Choice of front panel decor
- Choice of RAL colour for cover plates

Technical details:

- Ventilation cooling, electronic control unit
- Electric voltage 230V/50Hz
- Automatic defrosting and evaporation
- Hinged front glass for easy cleaning
- Rear sliding door
- Quick and easy maintenance
- Refrigerant R1234YF/R290

Temperature range:

+4 / +8°C (operating conditions +25°C and 60% ambient humidity)







Specification



	CUBE 600	CUBE 1000	CUBE 1500
Dimensions (mm)	590 x 735 x 1344	990 x 735 x 1344	1490 x 735 x 1344
Power (W)	510	610	910
Display area (m ²)	0,84	1,46	2,10
Weight (kg)	143	207	264

Color design



PEARL	GRAY	INOX	RED
BROWN	BLACK		

Possibly another RAL shade according to the customer



Model	CUBE II 600		CUBE II 1000		CUBE II 1500	
Length (mm)	590		990		1490	
Depth (mm)	742		742		742	
Height (mm)	1344		1344		1344	
Display area (m2)	0,84		1,46		2,1	
Temperature (°C)	+4/+8		+4/+8		+4/+8	
Power (W)	510	415	610	515	910	790
Energy class	E		F		G	
Cooler	R1234YF	R290	R1234YF	R290	R1234YF	R290
Consumption (kWh/24h)	6,6	6,4	10,5	7,17	14,72	12,8
Voltage (V/Hz)	230/50		230/50		230/50	
Weight (Kg)	143		207		264	



- Double tempered glass
- Tempered glass shelves
- LED lighting
- Choice of front decoration panel
- Choice of RAL colour for cover plates
- Ventilated cooling, electronic control unit
- Automatic defrost and evaporation
- Possibility to connect it for remote cooling
- Hinged front glass for easy cleaning
- Rear hinged doors
- Castores as option
- Operating conditions of +25 °C and 60 % ambient humidity

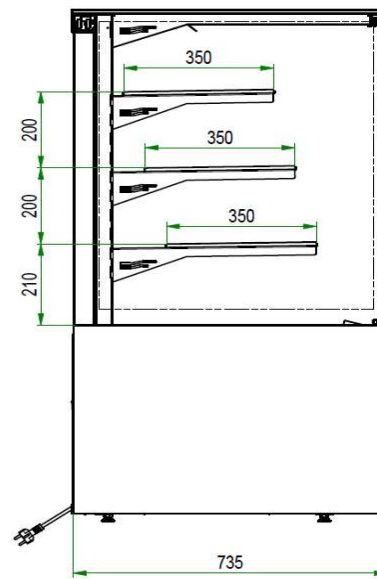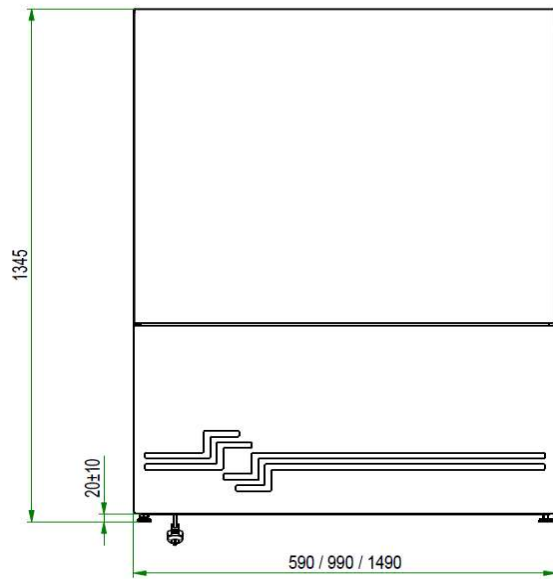



Model	CUBE II 600		CUBE II 1000		CUBE II 1500	
Length (mm)	590		990		1490	
Depth (mm)	742		742		742	
Height (mm)	1344		1344		1344	
Display area (m2)	0,84		1,46		2,1	
Temperature (°C)	+4/+8		+4/+8		+4/+8	
Power (W)	510	415	610	515	910	790
Energy class	E		F		G	
Cooler	R1234YF	R290	R1234YF	R290	R1234YF	R290
Consumption (kWh/24h)	6,6	6,4	10,5	7,17	14,72	12,8
Voltage (V/Hz)	230/50		230/50		230/50	
Weight (Kg)	143		207		264	



- Double tempered glass
- Tempered glass shelves
- LED lighting
- Choice of front decoration panel
- Choice of RAL colour for cover plates
- Ventilated cooling, electronic control unit
- Automatic defrost and evaporation
- Possibility to connect it for remote cooling
- Hinged front glass for easy cleaning
- Rear sliding doors
- Castors as option
- Operating conditions of +25 °C and 60 % ambient humidity

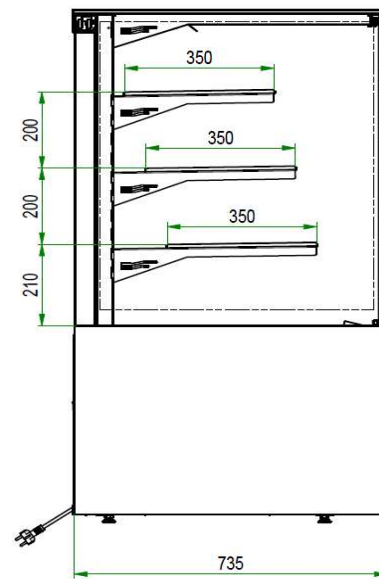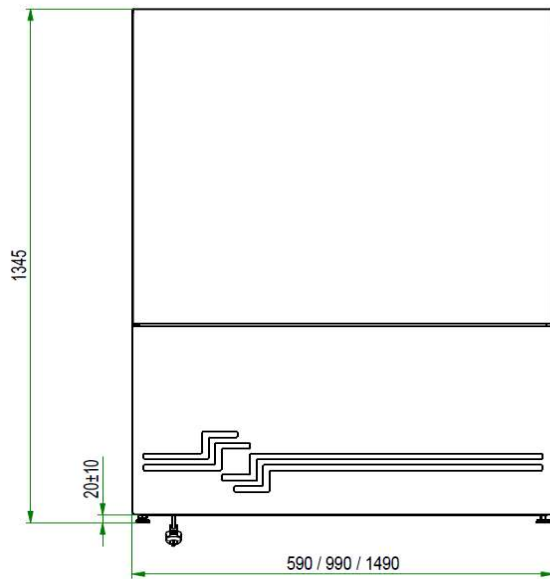



Model	CUBE II 600		CUBE II 1000		CUBE II 1500	
Length (mm)	590		990		1490	
Depth (mm)	742		742		742	
Height (mm)	1344		1344		1344	
Display area (m2)	0,84		1,46		2,1	
Temperature (°C)	+4/+8		+4/+8		+4/+8	
Power (W)	510	415	610	515	910	790
Energy class	E	E	F	E	G	F
Cooler	R1234YF	R290	R1234YF	R290	R1234YF	R290
Consumption (kWh/24h)	6,6	6,4	10,5	7,17	14,72	12,8
Voltage (V/Hz)	230/50		230/50		230/50	
Weight (Kg)	143		207		264	

- Double tempered glass
- Tempered glass shelves
- LED lighting
- Choice of front decoration panel
- Choice of RAL colour for cover plates
- Ventilated cooling, electronic control unit
- Automatic defrost and evaporation
- Possibility to connect it for remote cooling
- Hinged front glass for easy cleaning
- Rear sliding doors
- Castors as option
- Operating conditions of +25 °C and 60 % ambient humidity

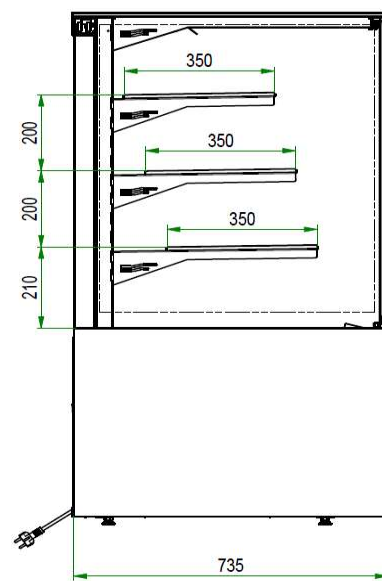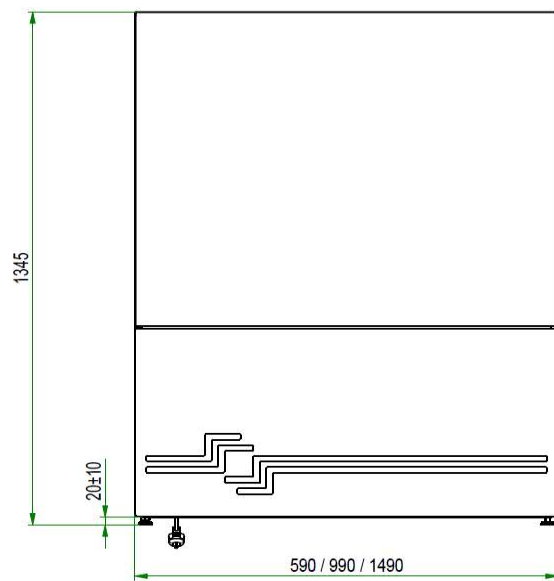

Cube II Grab & Go

An elegant display case for self-service sales to pastry shops, bakeries, shops, restaurants, gas stations and the like.

- Self-service
- Double outer tempered glass
- Tempered glass shelves
- LED lighting of the exhibition area
- Choice of front panel decor
- Choice of RAL colour for cover plates

Technical details:

- Ventilation cooling, electronic control unit
- Electric voltage 230V/50Hz
- Automatic defrosting and evaporation
- Hinged front glass for easy cleaning
- Rear sliding door
- Quick and easy maintenance
- Refrigerant R1234YF/R290

Temperature range:

+4 / +8°C (operating conditions +25°C and 60% ambient humidity)





Specification



	CUBE 600	CUBE 1000	CUBE 1500
Dimensions (mm)	590 x 735 x 1344	990 x 735 x 1344	1490 x 735 x 1344
Power (W)	510	610	910
Display area (m ²)	0,84	1,46	2,10
Weight(kg)	143	207	264

Color design



PEARL	GRAY	INOX	RED
BROWN	BLACK		

Possibly another RAL shade according to the customer



Model	CUBE II 600		CUBE II 1000		CUBE II 1500	
Length (mm)	590		990		1490	
Depth (mm)	735		735		735	
Height (mm)	1344		1344		1344	
Display area (m2)	0,84		1,46		2,1	
Temperature (°C)	+4/+8		+4/+8		+4/+8	
Power (W)	893	760	1725	946	1932	1247
Energy class	G	E	G	F	G	F
Cooler	R1234YF	R290	R1234YF	R290	R1234YF	R290
Consumption (kWh/24h)	10,72	7,17	12,49	10,72	19,72	13,72
Voltage (V/Hz)	230/50		230/50		230/50	
Weight (Kg)	143		207		259	



- Double tempered glass
- Tempered glass shelves
- LED lighting
- Choice of front decoration panel
- Choice of RAL colour for cover plates
- Ventilated cooling, electronic control unit
- Automatic defrost and evaporation
- Possibility to connect it for remote cooling
- Hinged front glass for easy cleaning
- Rear hinged doors
- Castors as option
- Operating conditions of +25 °C and 60 % ambient humidity

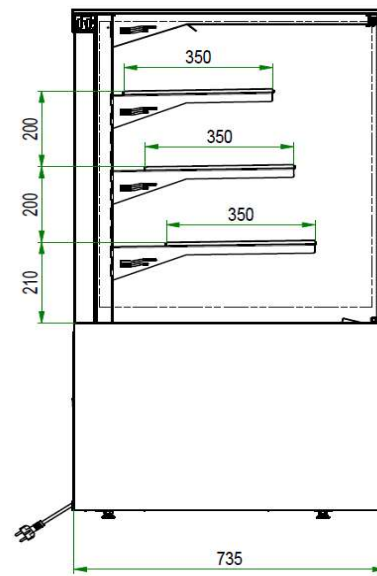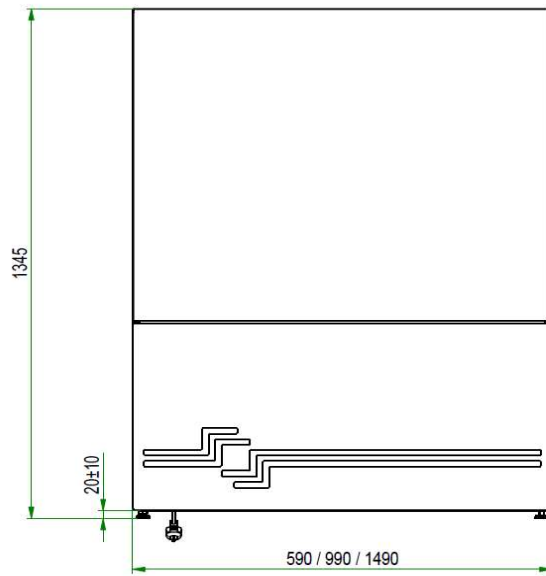



Model	CUBE II 600		CUBE II 1000		CUBE II 1500	
Length (mm)	590		990		1490	
Depth (mm)	735		735		735	
Height (mm)	1344		1344		1344	
Display area (m2)	0,84		1,46		2,1	
Temperature (°C)	+4/+8		+4/+8		+4/+8	
Power (W)	893	760	1725	946	1932	1247
Energy class	G	E	G	F	G	F
Cooler	R1234YF	R290	R1234YF	R290	R1234YF	R290
Consumption (kWh/24h)	10,72	7,17	12,49	10,72	19,72	13,72
Voltage (V/Hz)	230/50		230/50		230/50	
Weight (Kg)	143		207		259	



- Double tempered glass
- Tempered glass shelves
- LED lighting
- Choice of front decoration panel
- Choice of RAL colour for cover plates
- Ventilated cooling, electronic control unit
- Automatic defrost and evaporation
- Possibility to connect it for remote cooling
- Hinged front glass for easy cleaning
- Rear sliding doors
- Castors as option
- Operating conditions of +25 °C and 60 % ambient humidity

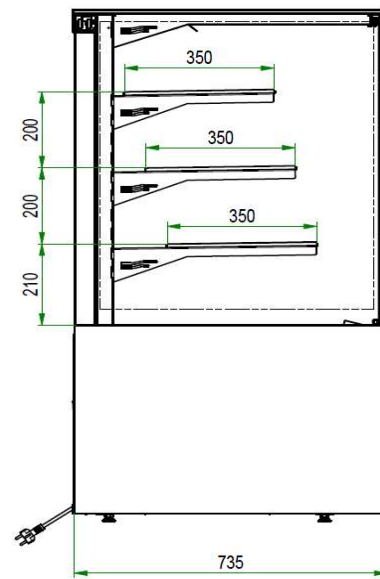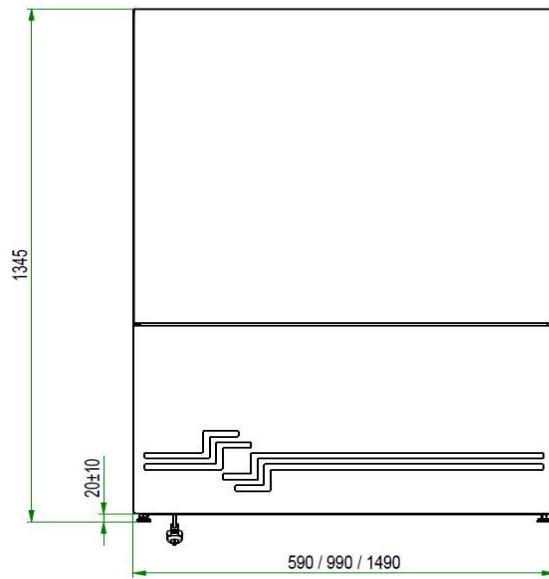



Model	CUBE II 600		CUBE II 1000		CUBE II 1500	
Length (mm)	590		990		1490	
Depth (mm)	735		735		735	
Height (mm)	1344		1344		1344	
Display area (m2)	0,84		1,46		2,1	
Temperature (°C)	+4/+8		+4/+8		+4/+8	
Power (W)	893	760	1725	946	1932	1247
Energy class	G	E	G	F	G	F
Cooler	R1234YF	R290	R1234YF	R290	R1234YF	R290
Consumption (kWh/24h)	10,72	7,17	12,49	10,72	19,72	13,72
Voltage (V/Hz)	230/50		230/50		230/50	
Weight (Kg)	143		207		259	

- Double tempered glass
- Tempered glass shelves
- LED lighting
- Choice of front decoration panel
- Choice of RAL colour for cover plates
- Ventilated cooling, electronic control unit
- Automatic defrost and evaporation
- Possibility to connect it for remote cooling
- Hinged front glass for easy cleaning
- Rear sliding doors
- Castors as option
- Operating conditions of +25 °C and 60 % ambient humidity

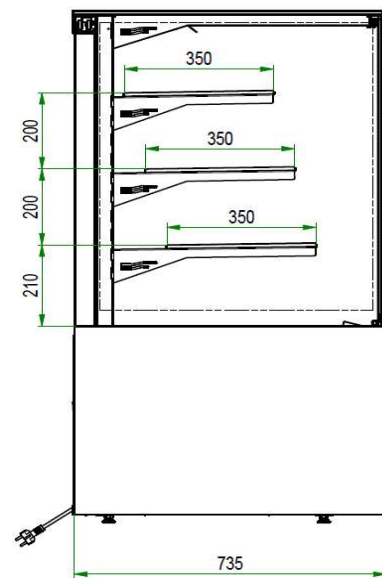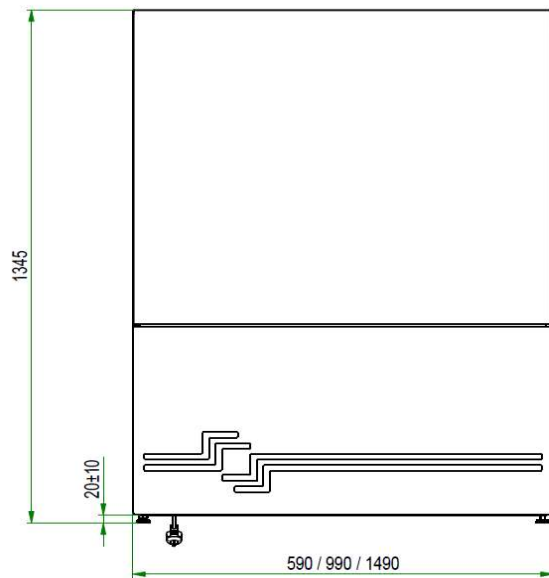

Cube II Dense Back

The CUBE II Dense Back refrigerated display case is designed as a fully open device for “quick/impulse” purchases of beverages, baguettes, dairy products, fruit/vegetable salads and other snacks.

- Self-service
- Double side tempered glass
- Tempered glass shelves
- LED lighting of the exhibition area
- Choice of front panel decor
- Choice of RAL colour for cover plates

Technical details:

- Ventilation cooling, electronic control unit
- Electric voltage 230V/50Hz
- Automatic defrosting and evaporation
- Quick and easy maintenance
- Refrigerant R1234YF/R290

Temperature range:

+4 / +8°C (operating conditions +25°C and 60% ambient humidity)



Specification

CUBE 1000

Dimensions (mm)	990 x 742 x 1344
Display area (m ²)	1,55
Power (W)	730
Weight (kg)	215

Color design

PEARL

GRAY

INOX

RED

BROWN

BLACK

Possibly another RAL shade according to the customer

CUBE II SELF-SERVICE

An elegant display case for self-service sales to pastry shops, bakeries, shops, restaurants, gas stations and the like. Thanks to the front hinged doors, this self-service showcase saves energy.

- Self-service
- Double outer tempered glass
- Tempered glass shelves & front hatches
- LED lighting of the exhibition area
- Choice of front panel decor
- Choice of RAL colour for cover plates

Technical details:

- Ventilation cooling, electronic control unit
- Electric voltage 230V/50Hz
- Automatic defrosting and evaporation
- Rear sliding door
- Quick and easy maintenance
- Refrigerant R1234YF/R290

Temperature range:

+4 / +8°C (operating conditions +25°C and 60% ambient humidity)



Specification

CUBE 1000

Dimensions (mm)	990 x 735 x 1344
Display area (m2)	1,46
Power (W)	610
Weight (kg)	207

Color design

PEARL

GRAY

INOX

RED

BROWN



BLACK

Possibly another RAL shade according to the customer



Model	CUBE II 1000 r	
Length (mm)	990	
Depth (mm)	742	
Height (mm)	1344	
Display area (m2)	1,46	
Temperature (°C)	+4/+8	
Power (W)	610	515
Energy class	F	E
Refrigerant	R1234YF	R290
Consumption (kWh/24h)	10,5	7,17
Voltage (V/Hz)	230/50	
Weight (Kg)	207	

- Double tempered glass
- Tempered glass shelves
- LED lighting
- Choice of front decoration panel
- Choice of RAL colour for cover plates
- Ventilated cooling, electronic control unit
- Automatic defrost and evaporation
- Possibility to connect it for remote cooling
- Front glass hatches (tempered)
- Rear sliding doors
- Castors as option
- Operating conditions of +25 °C and 60 % ambient humidity

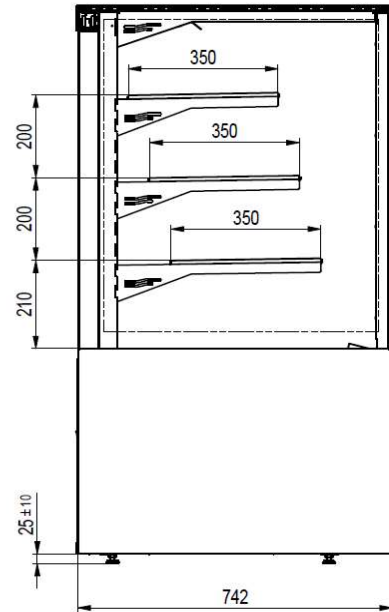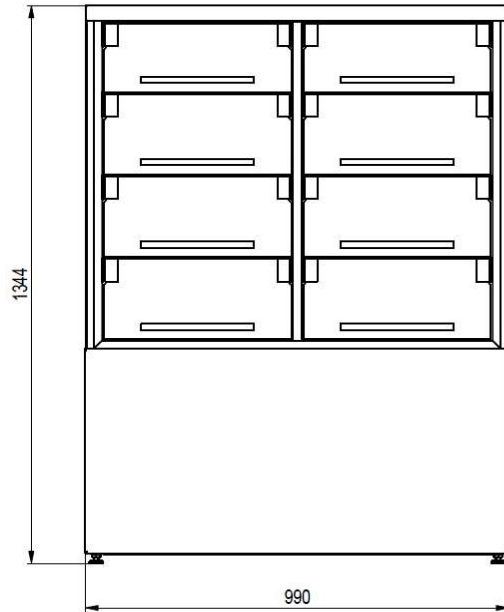

Cube II Static

The CUBE II Static model ranks with its design among the luxurious showcases of the CUBE series. This showcase is intended for the presentation and sale of delicate confectionery products. An evaporator is placed under each shelf, from which cold air falls freely downwards. This method of cooling is particularly suitable for sensitive products (e.g. confectionery products with different types of butter creams or coated sandwiches). Because static cooling is very gentle on the cooled products, product drying is almost negligible in contrast to showcases with forced air circulation.

- Serve over
- 3 independent evaporators under each shelf
- Each shelf is illuminated
- Hinged front glass
- Double tempered glass

Technical details:

- Static cooling, electronic control unit
- Electric voltage 230V/50Hz
- Automatic defrosting and evaporation
- Rear sliding door
- Quick and easy maintenance
- Refrigerant R1234YF/R290

Temperature range:

+4 / +8°C (operating conditions +25°C and 60% ambient humidity)



Specification

	CUBE 1000 Static	CUBE 1500 Static
Dimensions (mm)	990 x 725 x 1337	1490 x 725 x 1337
Display area (m ²)	1,22	1,85
Power (W)	569	711
Weight (kg)	207	264

Color design



PEARL	GRAY	INOX	RED
BROWN	BLACK		

Possibly another RAL shade according to the customer



Model	CUBE II 1000 Static		CUBE II 1500 Static	
Length (mm)	990		1490	
Depth (mm)	725		725	
Height (mm)	1324		1324	
Display area (m2)	1,22		1,83	
Temperature (°C)	+4/+8		+4/+8	
Power (W)	569	525	711	654
Energy class	D	D	D	D
Cooler	R1234YF	R290	R1234YF	R290
Consumption (kWh/24h)	6,7	6,4	7,6	7,1
Voltage (V/Hz)	230/50		230/50	
Weight (Kg)	207		264	

- Double tempered glass
- Tempered glass shelves
- LED lighting
- Choice of front decoration panel
- Choice of RAL colour for cover plates
- Static cooling, electronic control unit
- Automatic defrost and evaporation
- Hinged front glass for easy cleaning
- Rear sliding doors
- Castors as option
- Operating conditions of +25 °C and 60 % ambient humidity

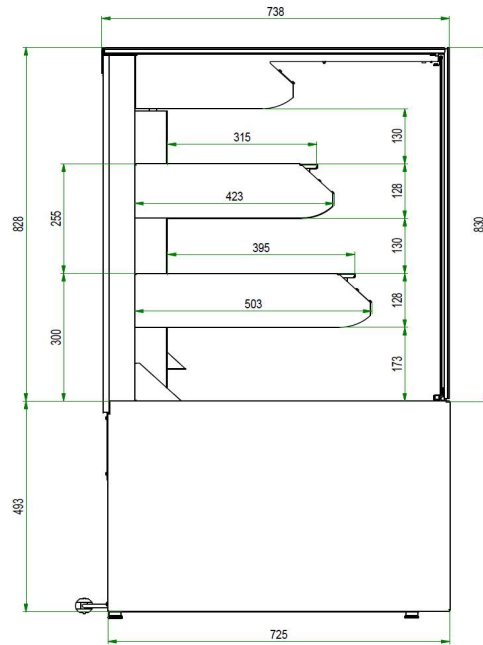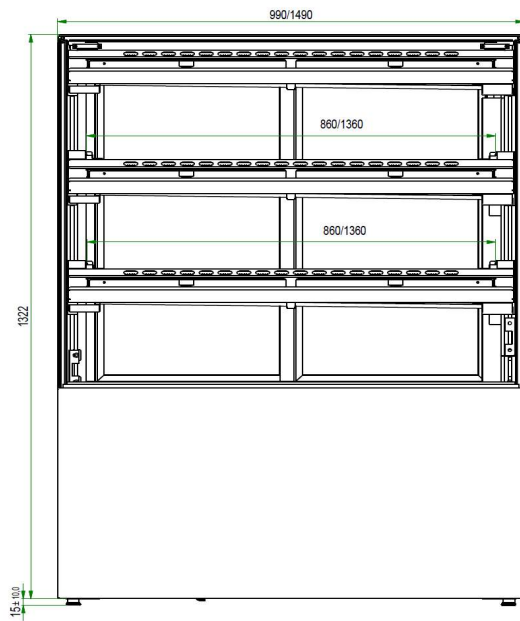

Cube II Transparent

A lightweight model of the popular square display case belonging to the family of refrigerated confectionery display cases. This elegant display case is distinguished from the existing CUBE II design by the cleaner lines of the glass top. As standard, the model has a pull-out unit, which significantly simplifies the maintenance of the device. Its dimensions and design fit into the CUBE II product line.

- Serve over
- Tempered single outer glass
- LED light under each shelf
- Choice of front panel decor
- Choice of RAL colour for cover plates

Technical details:

- Ventilation cooling, electronic control unit
- Electric voltage 230V/50Hz
- Automatic defrosting and evaporation
- Rear sliding door
- Quick and easy maintenance
- Refrigerant R1234YF/R290

Temperature range:

+4 / +8°C (operating conditions +25°C and 60% ambient humidity)





Specification



	CUBE 600	CUBE 1000	CUBE 1500
Dimensions (mm)	590 x 735 x 1344	990 x 735 x 1344	1490 x 735 x 1344
Display area (m ²)	0,84	1,46	2,10
Power (W)	510	562	704
Weight (kg)	155	215	280

Color design



PEARL	GRAY	INOX	RED
BROWN	BLACK		

Possibly another RAL shade according to the customer



Model	CUBE II 600		CUBE II 1000		CUBE II 1500	
Length (mm)	590		990		1490	
Depth (mm)	735		735		735	
Height (mm)	1344		1344		1344	
Display area (m2)	0,84		1,46		2,1	
Temperature (°C)	+4/+8		+4/+8		+4/+8	
Power (W)	510	435	562	515	704	652
Energy class	F	E	F	E	G	F
Cooler	R1234YF	R290	R1234YF	R290	R455A	R290
Consumption (kWh/24h)	8,7	6,97	10,1	8,03	15,33	14,08
Voltage (V/Hz)	230/50		230/50		230/50	
Weight (Kg)	155		215		280	

- single tempered glass
- Tempered glass shelves
- LED lighting under each shelf
- Choice of front decoration panel
- Choice of RAL colour for cover plates
- Ventilated cooling, electronic control unit
- Automatic defrost and evaporation
- Possibility to connect it for remote cooling
- Rear sliding doors
- Castors as option
- Operating conditions of +25 °C and 60 % ambient humidity

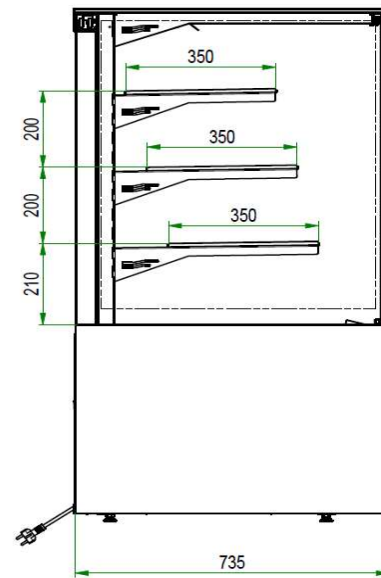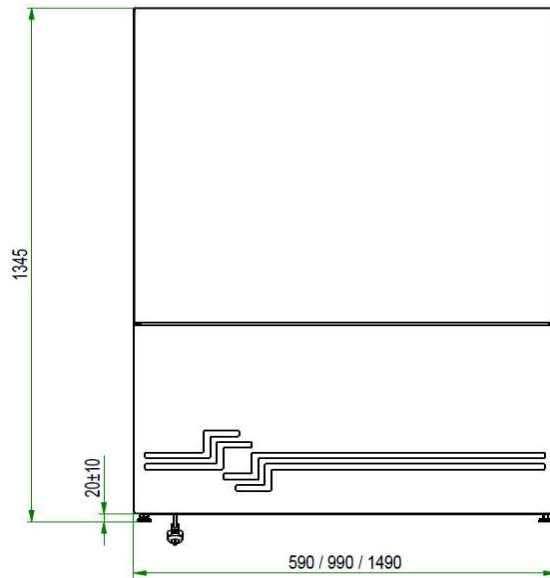

Cube II Jewelry

An elegant showcase for desserts, sweets, ideal for pastry shops, bakeries, shops, restaurants and the like.

- Serve over
- LED light
- Tempered single glass
- Rear storage space

Technical details:

- Ventilation cooling, electronic control unit
- Electric voltage 230V/50Hz
- Automatic defrosting and evaporation
- Rear sliding doors and drawer
- Refrigerant R1234YF/R290

Temperature range:

+4 / +8°C (operating conditions +25°C and 60% ambient humidity)





Specification

	CUBE 1000	CUBE 1500
Dimensions (mm)	985 x 736 x 1200	1485 x 736 x 1200
Display area (m ²)	0,7	1,05
Power (W)	410	610
Weight (kg)	142	213

Color design


PEARL	GRAY	INOX	RED
BROWN	BLACK		

Possibly another RAL shade according to the customer



Model	CUBE II 1000		r	CUBE II 1500		r
Length (mm)	985			1485		
Depth (mm)	736			736		
Height (mm)	1200			1200		
Display area (m2)	0,7			1,05		
Temperature (°C)	+4/+8			+4/+8		
Power (W)	410	320		610	455	
Energy class						
Cooler	R1234YF		R290	R1234YF		R290
Consumption (kWh/24h)	6,17		4,4	8,1		5,1
Voltage (V/Hz)	230/50			230/50		
Weight (Kg)	142			213		

- single tempered glass
- LED lighting
- Choice of front decoration panel
- Choice of RAL colour for cover plates
- Ventilated cooling, electronic control unit
- Automatic defrost and evaporation
- Possibility to connect it for remote cooling
- Rear hinged doors/drawers
- Operating conditions of +25 °C and 60 % ambient humidity

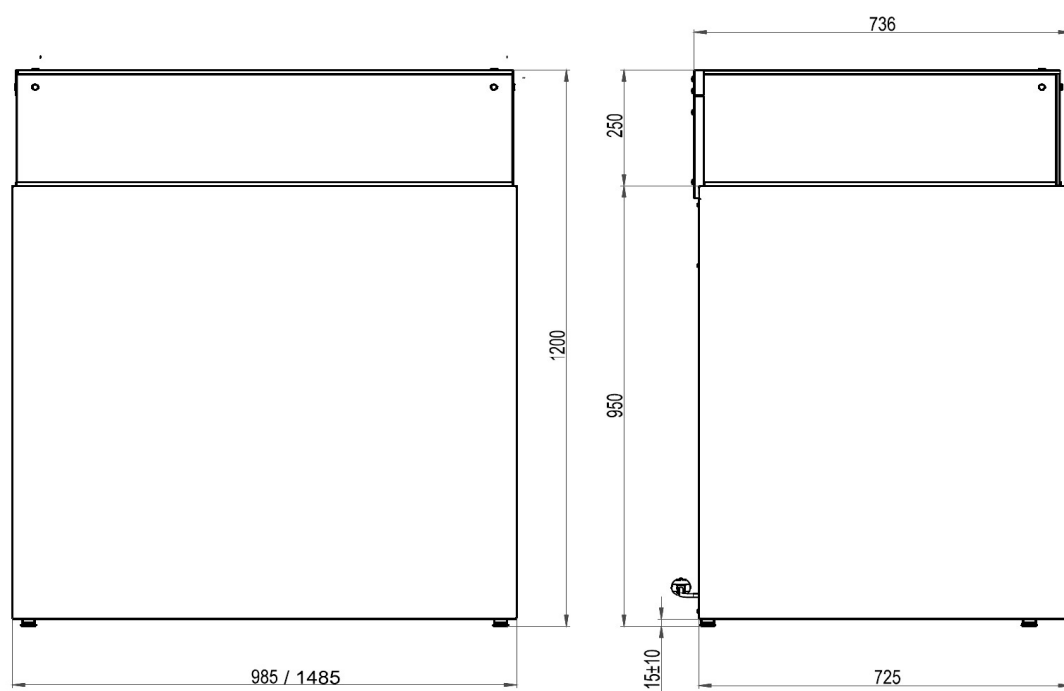

Cube II corner 90°

The 90° cooling corner adds an important element to the popular CUBE II showcase series, which makes it possible to assemble complete lines and sets according to the possibilities and needs of customers.

- Serve-over
- Double outer tempered glass
- Tempered glass shelves
- LED lighting
- Choice of front panel decor
- Choice of RAL design of perimeter sheets

Technical details:

- Ventilation cooling, electronic control unit
- Electric voltage 230V/50Hz
- Automatic defrosting and evaporation
- Hinged front glass for easy cleaning (2x)
- Rear hinged door
- Quick and easy maintenance
- Refrigerant R1234YF/R290

Temperature range:

- +4 / +8°C (operating conditions +25°C and 60% ambient humidity)



Specification	
	CUBE CORNER
Dimensions (mm)	1330 x 735 x 1345
Power (W)	1070
Display area (m ²)	2,94
Weight (kg)	340

Color design



PEARL	GRAY	INOX	RED
BROWN	BLACK		

Possibly another RAL shade according to the customer



Model	CUBE II 0	
Length (mm)	1330	
Depth (mm)	735	
Height (mm)	1344	
Display area (m2)	2,94	
Temperature (°C)	+4/+8	
Power (W)	1500	1070
Energy class	G	G
Cooler	R1234YF	R290
Consumption (kWh/24h)	23,58	15,8
Voltage (V/Hz)	230/50	
Weight (Kg)	340	

- Double tempered glass
- Tempered glass shelves
- LED lighting
- Choice of front decoration panel
- Choice of RAL colour for cover plates
- Ventilated cooling, electronic control unit
- Automatic defrost and evaporation
- Possibility to connect it for remote cooling
- Hinged front glass for easy cleaning (2)
- Rear hinged doors (2)
- Operating conditions of +25 °C and 60 % ambient humidity

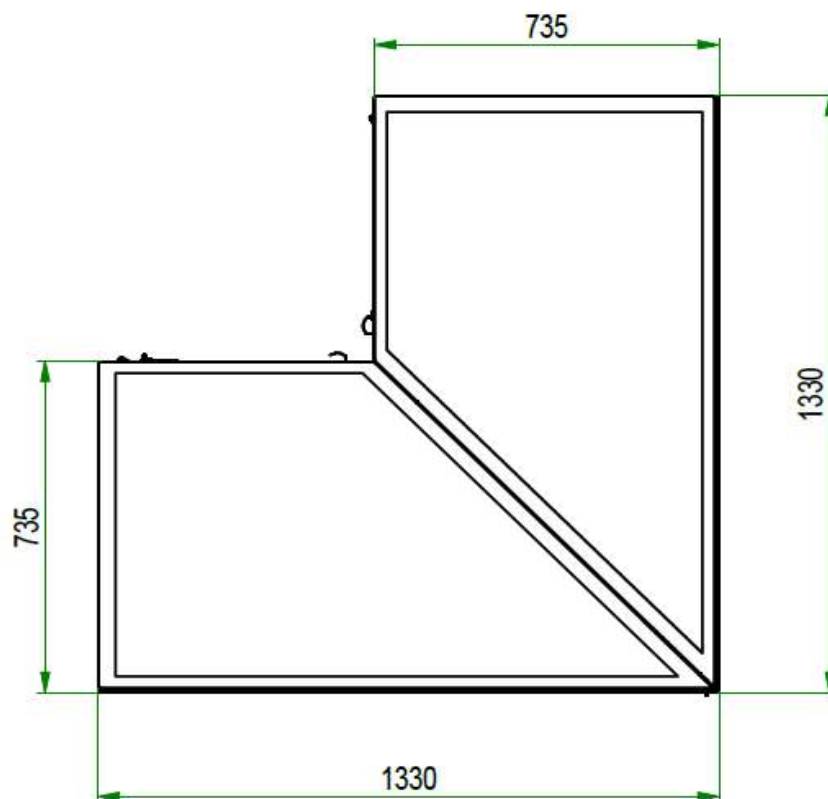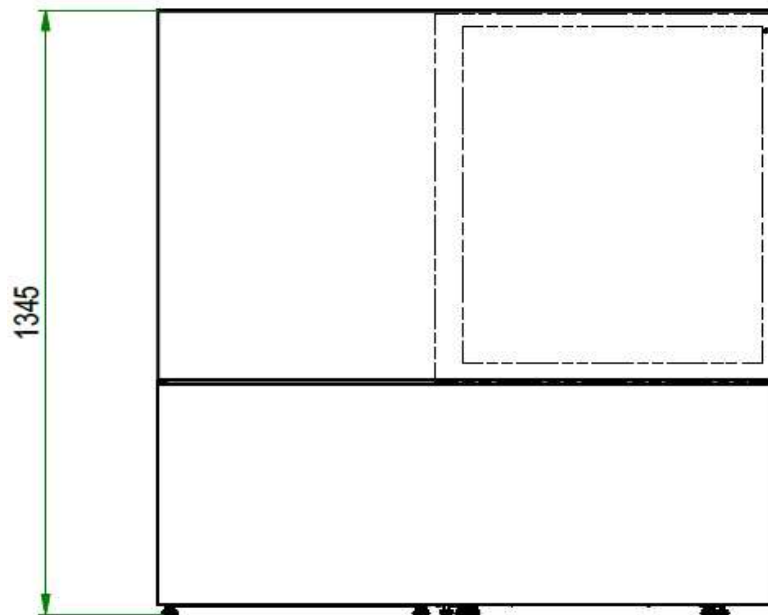



Cube II 1500, Grey Cube II 1500, Šedá



Cube II 1000, Pearl white Cube II 1000, Perlově bílá



Cube II 1000, Inox Cube II 1000, Nerez

CUBE II Standard

600 / 1000 / 1500

ENG

CUBE II counters offer a wide range of units in the same design to create a sale line according to customer's needs. CUBE II Standard counters are classic serve-over units equipped with tempered double glass panels to reduce the energetic consumption, there is a LED light on the top of the counter, on request all shelves can be LED illuminated. Triple connection glass must be ordered to create a sale line.

CZ

Řada CUBE II vitrín nabízí širokou škálu variant VITRÍN ve stejném designu pro vytvoření prodejních linek dle přání zákazníka. CUBE II Standard jsou klasické obslužné vitríny pro prodej zákusků vybavené kalenými dvojskly pro nižší spotřebu energie a LED osvětlením umístěným v horní části vitríny, na přání lze nasvítit každou polici jednotlivě. Velkou výhodou CUBE II vitrín je chlazení na samostatném výsuvném agregátu umožňující rychlý a snadný přístup ke všem komponentům. Pro spojování do sestav je nutné objednat spojovací trojsklo.



Hinged front glass

Výklopné čelní sklo



Pull-out aggregate

Výsuvný agregát



ENG Specifications:

- Double tempered outer glass
- Tempered glass shelves
- LED lightening of display area
- Excellent presentation of displayed goods
- Choice of front decoration panel
- Choice of RAL colour for cover plates
- Ventilation cooling, electronic control unit
- Automatic defrosting and evaporation
- Hinged front glass for easy cleaning
- Rear sliding doors
- Quick and easy maintenance
- Adjustable feet

α Specifikace:

- Dvojitá vnější kalená skla
- Kalené skleněné police
- LED osvětlení výstavního prostoru
- Vynikající prezentace vystavovaného zboží
- Možnost volby dekoru čelního panelu
- Volba RAL provedení obvodových plechů
- Ventilační chlazení, elektronická řídicí jednotka
- Automatické odtávání a odpařování
- Výklopné čelní sklo pro snadné čištění
- Zadní posuvná dvířka
- Rychlá a snadná údržba
- Nastavitelné nožky

Technical specification / Tabulka technických specifikací

Model	CUBE II 600	1000	1500
Length / Délka (mm)	590	990	1490
Width / Hloubka (mm)	735	735	735
Height / Výška (mm)	1344	1344	1344
Display area / Výstavní plocha (m ²)	0,84	1,46	2,1
Temperature / Teplotní rozsah (°C) *	4÷8	4÷8	4÷8
Rated power / Elektrický příkon (W)	510/415	610/515	910/790
Energy efficiency class / Energetická třída	E/E	F/E	G/F
Refrigerant / Chladivo	R1234YF / R290	R1234YF / R290	R1234YF / R290
Consumption / Spotřeba (kWh/24h)	6,6/6,4	10,5/7,17	14,72/12,8
Voltage / Napětí (V/Hz)	230/50	230/50	230/50
Weight / Váha (Kg)	143	207	259

* Ambient conditions +25 °C and 60% RH / Okolní podmínky +25 °C a 60% relativní vlhkost



Cube II 1500 Self-service

Cube II 1500 Self-service



Cube II 1000 Self-service, Black

Cube II 1000 Self-service, Černá



Cube II 600 Self-service, White

Cube II 600 Self-service, Bílá

CUBE II Self-service

600 / 1000 / 1500

ENG

There are 2 possibilities how to enable a Self-service sale. As first possibility there is a hole in the front glass panel, as option on request a night blind to close the space is available. As second possibility we provide a counter with the front flip-flop doors with hatches.

CZ

Self-servisový prodej zákusků je umožněn dvojím způsobem. První možnost je dodání vitríny s otvorem v předním skle, na požádání je možnost dodání i noční rolety pro úsporu energie. Druhou možností je dodání vitríny s předními výklopnými dvířky.



Cube II 1000 Self-service with hatches



Cube II 1000 Self-service s dvířky



Night blind

Noční roleta

ENG Specifications:

- Double tempered outer glass
- Tempered glass shelves
- LED lightening of display area
- Excellent presentation of displayed goods
- Choice of front decoration panel
- Choice of RAL colour for cover plates
- Ventilation cooling, electronic control unit
- Automatic defrosting and evaporation
- Hinged front glass for easy cleaning
- Rear sliding doors placed on bearings for easy and comfortable handling
- Quick and easy maintenance
- Adjustable feet

CZ Specifikace:

- Dvojité vnější kalená skla
- Kalené skleněné police
- LED osvětlení výstavního prostoru
- Vynikající prezentace vystavovaného zboží
- Možnost volby dekoru čelního panelu
- Volba RAL provedení obvodových plechů
- Ventilační chlazení, elektronická řídicí jednotka
- Automatické odtávání a odpařování
- Výklopné čelní sklo pro snadné čištění
- Zadní posuvná dvířka
- Rychlá a snadná údržba
- Nastavitelné nožky

Technical specification / Tabulka technických specifikací

Model	CUBE II Self-service 600	1000	1500
Length / Délka (mm)	590	990	1490
Width / Hloubka (mm)	735	735	735
Height / Výška (mm)	1344	1344	1344
Display area / Výstavní plocha (m ²)	0,84	1,46	2,1
Temperature / Teplotní rozsah (°C)*	4÷8	4÷8	4÷8
Rated power / Elektrický příkon (W)	893/760	1725/946	1932/1247
Energy efficiency class / Energetická třída	G/E	G/F	G/F
Refrigerant / Chladivo	R1234Y F / R290	R1234YF / R290	R 1234YF / R290
Consumption / Spotřeba (kWh/24h)	10,72/7,17	12,49/10,72	19,72/13,72
Voltage / Napětí (V/Hz)	230/50	230/50	230/50
Weight / Váha (Kg)	143	207	259

* Ambient conditions +25 °C and 60% RH / Okolní podmínky +25 °C a 60% relativní vlhkost



Cube II 1000 Dense Back, Black

Cube II 1000 Dense Back, Černá

CUBE II

Dense Back

1000

ENG

**Grab' n Go Fully open cabinet
as wall unit.**

Specifications:

- Suitable for drinks, sandwiches, baguettes, and other snacks
- Side and top tempered double glass
- Front and side panels in any RAL colour
- Bottom display shelf and back panel from inox
- Tempered glass shelves
- Adjustable feet
- LED light
- Electronic control board - placed at the back
- Ventilated cooling
- Automatic defrosting and evaporation
- Choice of front decoration panel
- Choice of RAL colour for cover plates

CZ

**Plně otevřená vitrina pro samoobslužný
prodej jako přístěnná vitrina.**

Specifikace:

- Vhodné pro nápoje, sendviče, bagety atd.
- Nastavitelné nožky
- Kalené skleněné police
- Spodní police a zadní panel z nerez
- Boční a horní izolační kalená skla
- Ventilační chlazení
- LED osvětlení
- Automatické odtávání a odpařování
- Elektronická řídicí jednotka umístěná na zadní straně
- Možnost volby barevného provedení obvodových plechů
- Možnost volby dekoru čelního panelu

Technical specification / Tabulka technických specifikací

Model	CUBE II Dense Back 1000
Length / Délka (mm)	990
Width / Hloubka (mm)	735
Height / Výška (mm)	1344
Display area / Výstavní plocha (m ²)	1,55
Temperature / Teplotní rozsah (°C)*	4÷8
Rated power / Elektrický příkon (W)	730
Energy efficiency class / Energetická třída	G/F
Refrigerant / Chladivo	R1234YF / R290
Consumption / Spotřeba (kWh/24h)	13,8/10,2
Voltage / Napětí (V/Hz)	230/50
Weight / Váha (Kg)	215

* Ambient conditions +25 °C and 60% RH /
Okolní podmínky +25 °C a 60% relativní vlhkost

ENG

For maximal product visibility of pastry there are clear transparent single glass without any print. Not suitable for line connection.

Specifications:


- Only in serve-over version
- Front, side and top tempered single glass
- Tempered glass shelves
- LED light under each shelf
- Ventilation cooling, electronic control unit
- Automatic defrosting and evaporation
- Rear sliding doors placed on bearings for easy and comfortable handling
- Adjustable feet
- Choice of front decoration panel
- Choice of RAL colour for cover plates

CZ

Pro maximální viditelnost prodávanych delikates je vitrina osazena transparentními jedno-skly bez jakéhokoliv potisku. Není možné spojovat do sestav.

Specifikace:

- Provedení obslužné
- Jednoduché kalené sklo bez potisku
- Kalené skleněné police
- LED osvětlení pod každou polici
- Ventilační chlazení, elektronická řídicí jednotka
- Automatické odtávání a odpařování
- Zadní posuvná dvířka
- Nastavitelné nožky
- Možnost volby dekoru čelního panelu
- Volba RAL provedení obvodových plechů
- Zadní dvířka na ložiscích

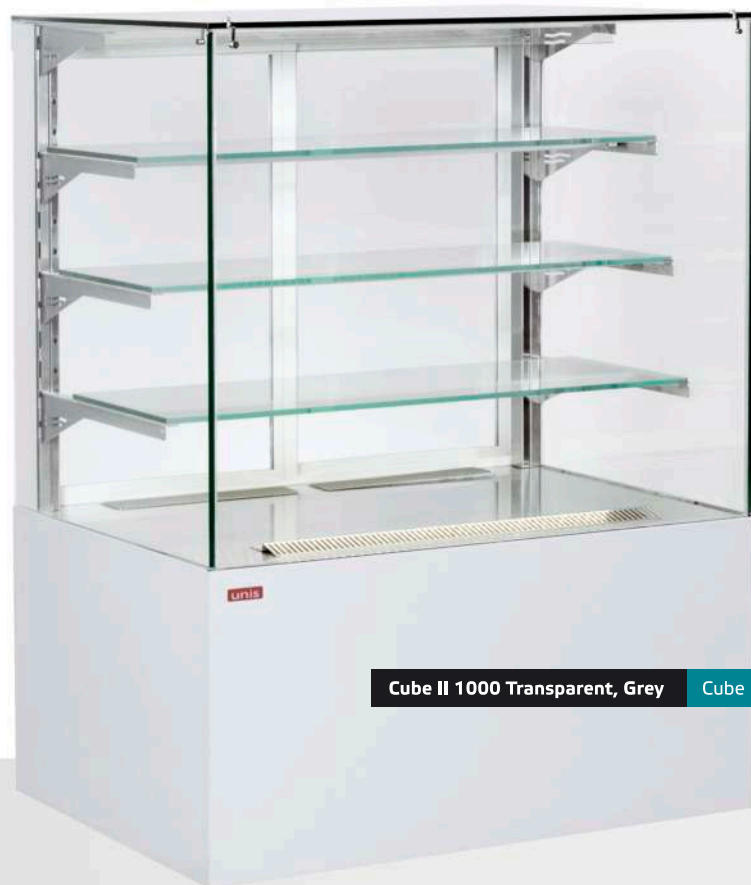

Cube II 1000 Transparent, Grey

Cube II 1000 Transparent, Šedá

CUBE II

Transparent

600 / 1000 / 1500

Technical specification / Tabulka technických specifikací

Model	CUBE II Transparent 600	1000	1500
Length / Délka (mm)	590	990	1490
Width / Hloubka (mm)	735	735	735
Height / Výška (mm)	1344	1344	1344
Display area / Výstavní plocha (m ²)	0,84	1,46	2,1
Temperature / Teplotní rozsah (°C) *	4÷8	4÷8	4÷8
Rated power / Elektrický příkon (W)	510/435	562/515	704/652
Energy efficiency class / Energetická třída	F/E	F/E	G/F
Refrigerant / Chladivo	R1234YF / R290	R1234YF / R290	R455A / R290
Consumption / Spotřeba (kWh/24h)	8,7/6,97	10,1/8,03	15,33/14,08
Voltage / Napětí (V/Hz)	230/50	230/50	230/50
Weight / Váha (Kg)	155	215	280

* Ambient conditions +25 °C and 60% RH / Okolní podmínky +25 °C a 60% relativní vlhkost



Sliding back doors
Zadní posuvná dvířka

Drawers
Výsuvná výstavní plocha



CUBE II

Jewellery

1000 / 1500

ENG

Elegant display cabinet for sale of desserts and confectionary products in pastry shops, bakeries, stores, restaurants and so on.

Specifications:

- Excellent visibility of offered goods
- Ventilated cooling, electronic control unit
- Tempered single glass
- Automatic defrosting and evaporation
- Back sliding doors or pull-out drawers
- LED lightening of display area
- Adjustable feet
- Choice of front decoration panel
- Choice of RAL colour for cover plates

CZ

Elegantní vitrina pro prodej zákusků a cukrářských výrobků v cukrárnách, pekárnách, obchodech, restauracích apod.

Specifikace:

- Vynikající viditelnost nabízeného zboží
- Ventilační chlazení, elektronická řídicí jednotka
- Kalená jednoduchá skla
- Automatické odtávání a odpařování
- Zadní posuvná dvířka nebo výsuvná výstavní deska
- LED osvětlení výstavního prostoru
- Nastavitelné nožky
- Možnost volby dekoru čelního panelu
- Volba RAL provedení obvodových plechů

Technical specification / Tabulka technických specifikací

Model	CUBE II Jewellery 1000 1500	
Length / Délka (mm)	985	1485
Width / Hloubka (mm)	725	725
Height / Výška (mm)	1200	1200
Display area / Výstavní plocha (m ²)	0,7	1,05
Temperature / Teplotní rozsah (°C) *	4÷8	4÷8
Rated power / Elektrický příkon (W)	410/320	610/455
Energy efficiency class / Energetická třída	G/E	G/E
Refrigerant / Chladivo	R1234YF / R290	R1234YF / R290
Consumption / Spotřeba (kWh/24h)	6,17/4,4	8,1/5,1
Voltage / Napětí (V/Hz)	230/50	230/50
Weight / Váha (Kg)	142	213

* Ambient conditions +25 °C and 60% RH /
Okolní podmínky +25 °C a 60% relativní vlhkost



Cube II 1000 Static, White

Cube II 1000 Static, Bílá

ENG

This cabinet is intended for the presentation and sale of sweet pastries, especially those filled with whipped cream, butter cream or custard. Static cooling is provided in the whole display area as there are three separate evaporators placed under each shelf.

Specifications:

- Static cooling, electronic control unit
- Tempered double-glass
- Hinged front glass for easy cleaning
- 3 separate evaporators under each shelf
- LED light under each shelf
- Rear sliding doors placed on bearings for easy and comfortable handling
- Automatic defrosting and evaporation
- Adjustable feet
- Choice of front decoration panel
- Choice of RAL colour for cover plates

CZ

CUBE II Static vitrina s výparníky pod každou policí je vhodná především pro prezentaci a prodej citlivých cukrářských výrobků zdobených šlehačkou, máslovými krémy apod. nebo pro prodej obložených chlebičků.

Specifikace:

- Statické chlazení, elektronická řídicí jednotka
- Dvojitá vnější kalená skla
- 3 nezávislé výparníky pod každou policí
- LED osvětlení pod každou policí
- Automatické odtávání a odpařování
- Výklopné čelní sklo pro snadné čištění
- Zadní posuvná dvířka
- Nastavitelné nožky
- Možnost volby dekoru čelního panelu
- Volba RAL provedení obvodových plechů

CUBE II

Static

1000/1500

Technical specification / Tabulka technických specifikací

Model	CUBE II Static 1000 1500	
Length / Délka (mm)	990	1490
Width / Hloubka (mm)	725	725
Height / Výška (mm)	1324	1324
Display area / Výstavní plocha (m ²)	1,22	1,83
Temperature / Teplotní rozsah (°C)*	4÷8	4÷8
Rated power / Elektrický příkon (W)	569/525	711/654
Energy efficiency class / Energetická třída	D	D
Refrigerant / Chladivo	R1234YF / R290 R1234YF / R290	
Consumption / Spotřeba (kWh/24h)	6,7/6,4	7,6/7,1
Voltage / Napětí (V/Hz)	230/50	230/50
Weight / Váha (Kg)	207	264

* Ambient conditions +25 °C and 60% RH / Okolní podmínky +25 °C a 60% relativní vlhkost

ENG

This cabinet is intended for the presentation and sale of ice-cream.

Specifications:

- Ventilated cooling, electronic control unit
- Container for ice-cream scoop
- Adjustable feet
- Automatic defrosting and evaporation
- Hinged front glass for easy cleaning
- Tempered double glass
- LED lightening of display area
- Choice of front decoration panel
- Choice of RAL colour for cover plates
- Night blind

CZ

Tato vitrína je určena k prezentaci a prodeji zmrzliny.

Specifikace:

- Ventilační chlazení, elektronická řídicí jednotka
- Vanička pro kleště na zmrzlinu
- Pojezdová kolečka / stavitelné nožky
- Automatické odtávání a odpařování
- Výklopné čelní sklo pro snadné čištění
- Dvojitá vnější kalená skla
- Kalené skleněné police
- LED osvětlení výstavního prostoru
- Možnost volby dekoru čelního panelu
- Volba RAL provedení obvodových plechů
- Noční roleta

Cube II 1500 Ice-Cream

Cube II 1500 Ice-Cream

Cube II 1000 Ice-Cream



CUBE II

Ice-Cream

1000 / 1500

Technical specification / Tabulka technických specifikací

Model	CUBE II Ice-Cream 1000	1500
Length / Délka (mm)	955	1455
Width / Hloubka (mm)	810	810
Height / Výška (mm)	1357	1357
Ice-cream tray / Vanička (5 l)	6	10
Temperature / Teplotní rozsah (°C) *	-16/-20	-16/-20
Rated power / Elektrický příkon (W)	870	1100
Energy efficiency class / Energetická třída	G	G
Refrigerant / Chladivo	R290	R445A
Consumption / Spotřeba (kWh/24h)	9,81	15,37
Voltage / Napětí (V/Hz)	230/50	230/50
Weight / Váha (Kg)	210	295

* Ambient conditions +25 °C and 60% RH /
Okolní podmínky +25 °C a 60% relativní vlhkost



Cube II 1000 Hot Standard

Cube II 1000 Hot Standard

Cube II 1000 Hot Self-service



CUBE II

Hot

1000 Standard / Self-service

ENG

CUBE II HOT counter is aimed for sale of warm food. May be produced in serve-over version or self-service version with front sliding doors. Air circulation is provided by tangential fans.

Specifications:

- Electronic control unit
- Tempered double glass
- Water tray for humidification of inner space
- 3 chromed grid shelves
- Rear sliding doors, in Self-service version in front also
- Exhibition board from stainless steel
- Choice of front decoration panel
- Choice of RAL colour for cover plates
- Adjustable feet

CZ

CUBE II Hot vitrína je určena k prodeji teplých pokrmů. K dispozici je v obslužném nebo samoobslužném provedení, které je doplněno o přední posuvná dvířka. Cirkulace vzduchu je zajištěna tangenciálním ventilátorem.

Specifikace:

- Elektronická řídicí jednotka
- Šuplík na vodu pro mírné zvlhčení vnitřního prostoru
- 3 chromované roštové police
- Zadní posuvná dvířka, u samoobslužné verze také vepředu
- Výstavní deska z nerez
- Možnost volby dekoru čelního panelu
- Volba RAL provedení obvodových plechů
- Nastavitelné nožky

Technical specification / Tabulka technických specifikací

Model	CUBE II Hot 1000
Length / Délka (mm)	990
Width / Hloubka (mm)	735
Height / Výška (mm)	1324
Display area / Výstavní plocha (m ²)	1
Temperature / Teplotní rozsah (°C) *	30÷80
Rated power / Elektrický příkon (W)	3100
Consumption / Spotřeba (kWh/24h)	23,58/15,8
Voltage / Napětí (V/Hz)	230/50
Weight / Váha (Kg)	172

* Ambient conditions +25 °C and 60% RH /
Okolní podmínky +25 °C a 60% relativní vlhkost



Cube II Cooling Corner 90°

CUBE II Chladicí roh 90°

Cube II Cooling Corner 90° Line ■



CUBE II 90° Cooling Corner

ENG

The 90° cooling corner adds an important element to the popular CUBE II showcase series, which makes it possible to assemble complete lines and sets according to the possibilities and needs of customers.

Specifications:

- Double tempered glass
- Tempered glass shelves
- LED lighting
- Choice of front decoration panel
- Choice of RAL colour for cover plates
- Ventilated cooling, electronic control unit
- Automatic defrosting and evaporation
- Hinged front glass for easy cleaning (2x)
- Rear hinged doors (2x)

CZ

Chladicí roh 90° doplňuje populární řadu vitrín CUBE II o důležitý prvek, díky kterému je možné sestavovat ucelené linky a sestavy podle možností a potřeb zákazníků.

Specifikace:

- Dvojitá vnější kalená skla
- Kalené skleněné police
- LED osvětlení výstavního prostoru
- Možnost volby dekoru čelního panelu
- Volba RAL provedení obvodových plechů
- Ventilační chlazení, elektronická řídicí jednotka
- Automatické odtávání a odpařování
- Výklopné čelní sklo pro snadné čištění
- Zadní křídlová dvířka (2x)

Technical specification / Tabulka technických specifikací

Model	CUBE II Corner 90°
Length / Délka (mm)	1330
Width / Hloubka (mm)	735
Height / Výška (mm)	1344
Display area / Výstavní plocha (m²)	2,94
Temperature / Teplotní rozsah (°C)*	4÷8
Rated power / Elektrický příkon (W)	1500/1070
Energy efficiency class / Energetická třída	G / G
Refrigerant / Chladivo	R1234Y / R290
Consumption / Spotřeba (kWh/24h)	23,58/15,8
Voltage / Napětí (V/Hz)	230/50
Weight / Váha (Kg)	340

* Ambient conditions +25 °C and 60% RH /
Okolní podmínky +25 °C a 60% relativní vlhkost



Cube II Neutral Corner 45°

Cube II Neutrální roh 45°



Cube II Line

Cube II Linka


CUBE II 45° Neutral Corner

Technical specification / Tabulka technických specifikací

Model	CUBE II Corner 45°
Length / Délka (mm)	972 / 400
Width / Hloubka (mm)	696
Height / Výška (mm)	1344
Display area / Výstavní plocha (m²)	1,15
Rated power / Elektrický příkon (W)	41
Consumption / Spotřeba (kWh/24h)	0,98
Voltage / Napětí (V/Hz)	230/50
Weight / Váha (Kg)	109


CUBE II

Standard
Self Service
Transparent


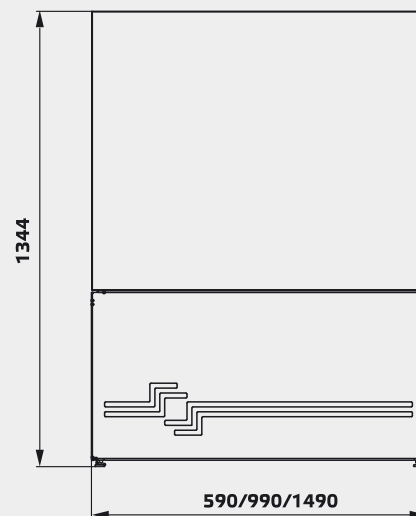


Dimensions / Rozměry



Hot

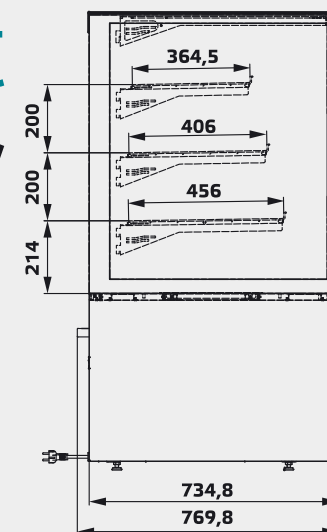


↓ Dense Back

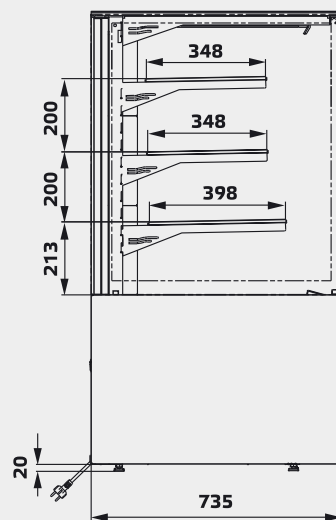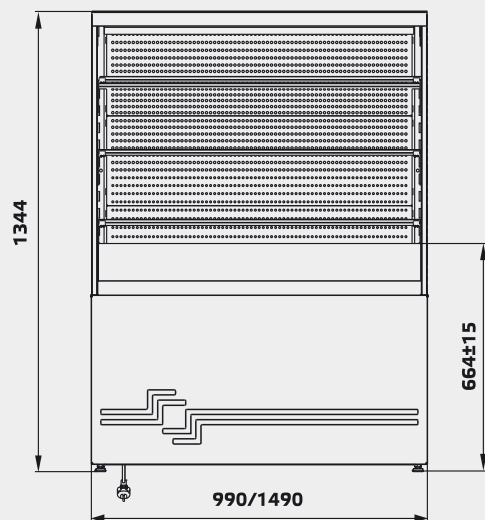


Ice Cream

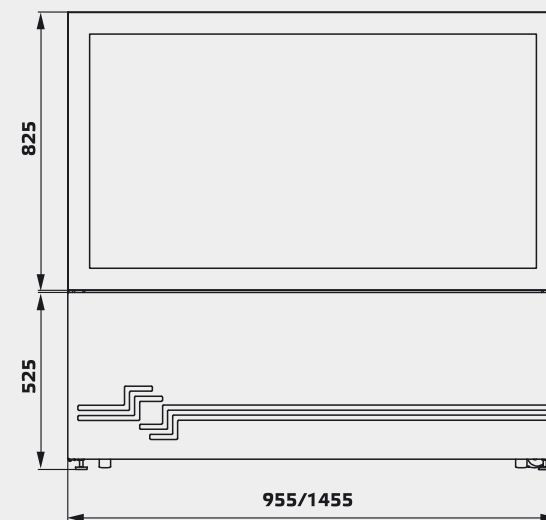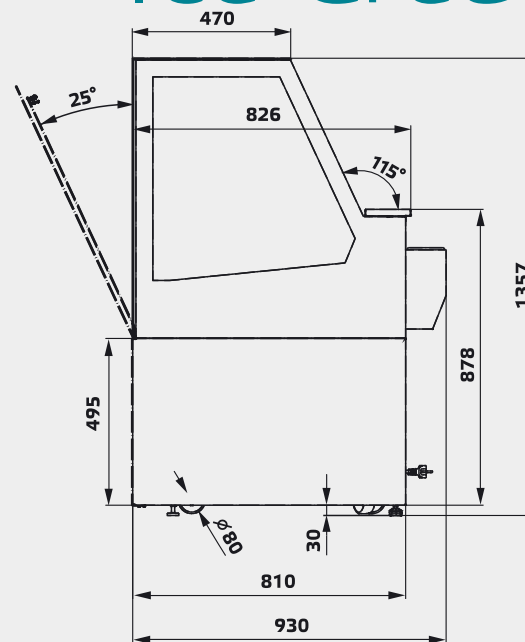


↓ Static

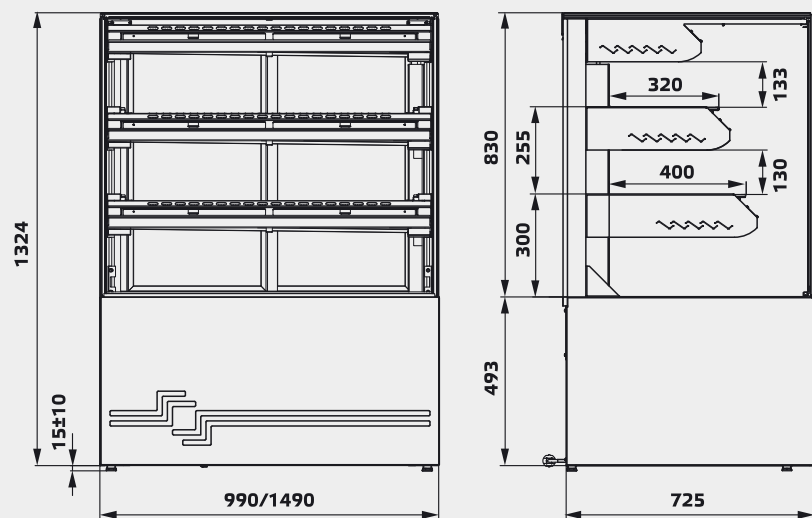


↓ Corner/Roh 45°

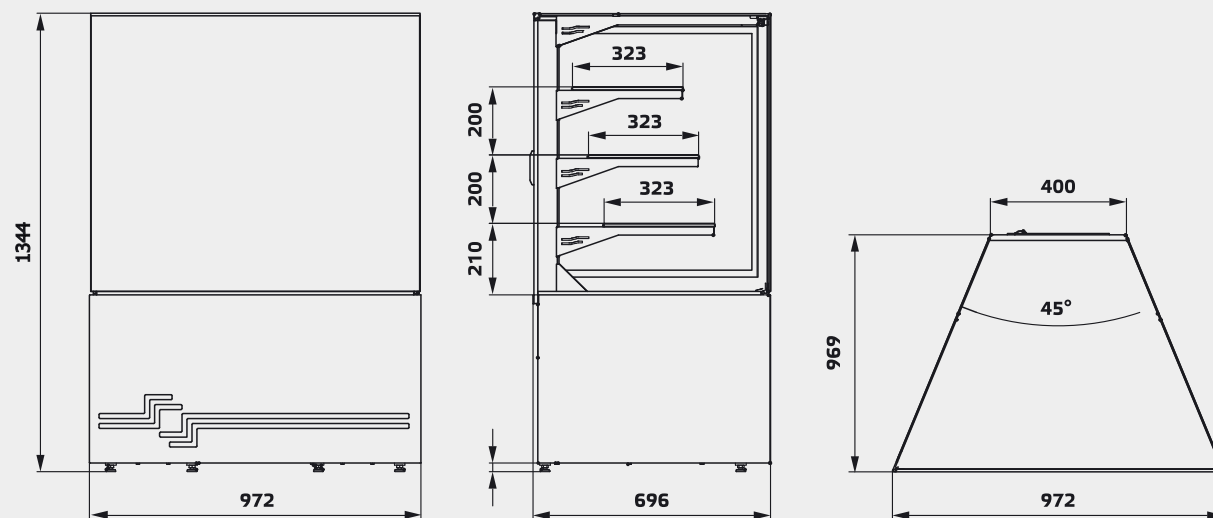

↓ Jewellery

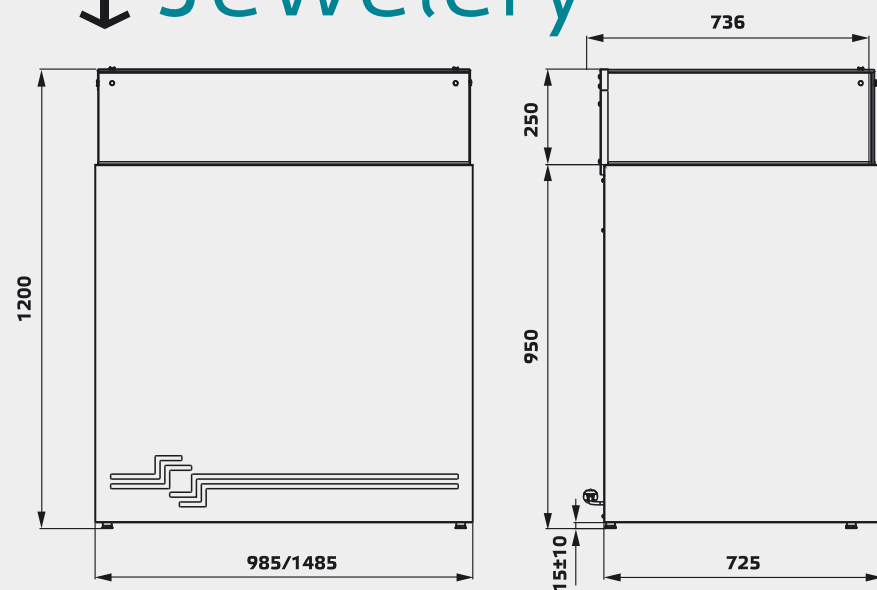

↓ Corner/Roh 90°

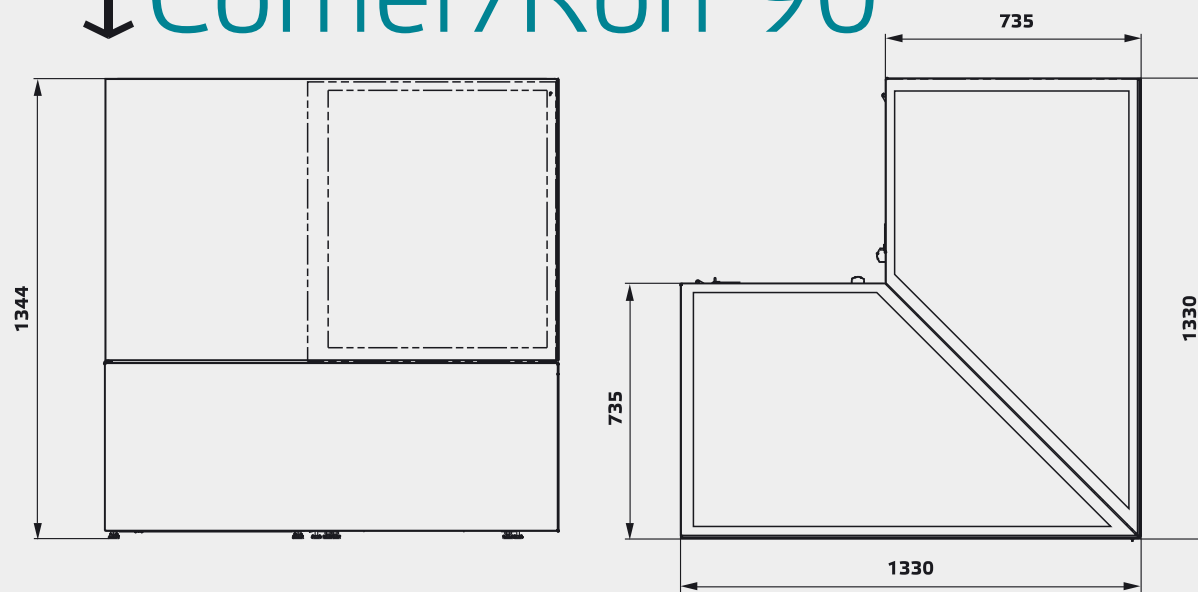



По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04 Ангарск (3955)60-70-56 Архангельск (8182)63-90-72 Астрахань (8512)99-46-04 Барнаул (3852)73-04-60 Белгород (4722)40-23-64 Благовещенск (4162)22-76-07 Брянск (4832)59-03-52 Владивосток (423)249-28-31 Владикавказ (8672)28-90-48 Владимир (4922)49-43-18 Волгоград (844)278-03-48 Вологда (8172)26-41-59 Воронеж (473)204-51-73 Екатеринбург (343)384-55-89	Иваново (4932)77-34-06 Ижевск (3412)26-03-58 Иркутск (395)279-98-46 Казань (843)206-01-48 Калининград (4012)72-03-81 Калуга (4842)92-23-67 Кемерово (3842)65-04-62 Киров (8332)68-02-04 Коломна (4966)23-41-49 Кострома (4942)77-07-48 Краснодар (861)203-40-90 Красноярск (391)204-63-61 Курск (4712)77-13-04 Курган (3522)50-90-47 Липецк (4742)52-20-81	Магнитогорск (3519)55-03-13 Москва (495)268-04-70 Мурманск (8152)59-64-93 Набережные Челны (8552)20-53-41 Нижний Новгород (831)429-08-12 Новокузнецк (3843)20-46-81 Ноябрьск (3496)41-32-12 Новосибирск (383)227-86-73 Омск (3812)21-46-40 Орел (4862)44-53-42 Оренбург (3532)37-68-04 Пенза (8412)22-31-16 Петрозаводск (8142)55-98-37 Псков (8112)59-10-37 Пермь (342)205-81-47	Ростов-на-Дону (863)308-18-15 Рязань (4912)46-61-64 Самара (846)206-03-16 Санкт-Петербург (812)309-46-40 Саратов (845)249-38-78 Севастополь (8692)22-31-93 Саранск (8342)22-96-24 Симферополь (3652)67-13-56 Смоленск (4812)29-41-54 Сочи (862)225-72-31 Ставрополь (8652)20-65-13 Сургут (3462)77-98-35 Сыктывкар (8212)25-95-17 Тамбов (4752)50-40-97 Тверь (4822)63-31-35	Тольятти (8482)63-91-07 Томск (3822)98-41-53 Тула (4872)33-79-87 Тюмень (3452)66-21-18 Ульяновск (8422)24-23-59 Улан-Удэ (3012)59-97-51 Уфа (347)229-48-12 Хабаровск (4212)92-98-04 Чебоксары (8352)28-53-07 Челябинск (351)202-03-61 Череповец (8202)49-02-64 Чита (3022)38-34-83 Якутск (4112)23-90-97 Ярославль (4852)69-52-93
Россия +7(495)268-04-70	Казахстан +7(727)345-47-04	Беларусь +(375)257-127-884	Узбекистан +998(71)205-18-59	Киргизия +996(312)96-26-47

эл.почта: usi@nt-rt.ru || сайт: <https://unis.nt-rt.ru/>