

Витрины холодильные для кондитерских изделий и деликатесов PANORAMA

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: usi@nt-rt.ru || сайт: <https://unis.nt-rt.ru/>

Panorama Low

Low version of the popular square display case. As standard, the model has a pull-out aggregate, which significantly simplifies the maintenance of the device.

- Serve-over
- Transparent double, tempered glasses without color printing on the edges
- LED lighting
- Choice of front panel decor
- Choice of RAL design of perimeter sheets

Technical details:

- Ventilation cooling, electronic control unit
- Voltage 230V/50Hz
- Automatic defrosting and evaporation
- Hinged front glass
- Rear sliding door
- Quick and easy maintenance
- Refrigerant R290

Temperature range:

+4 / +8°C (operating conditions +25°C and 60% ambient humidity)





Specification

PANORAMA 1000 LOW


Dimensions
(mm) 990 x 735 x 850

Power (W) 500

Display area (m²) 0,42

Weight (kg) 145

Color design


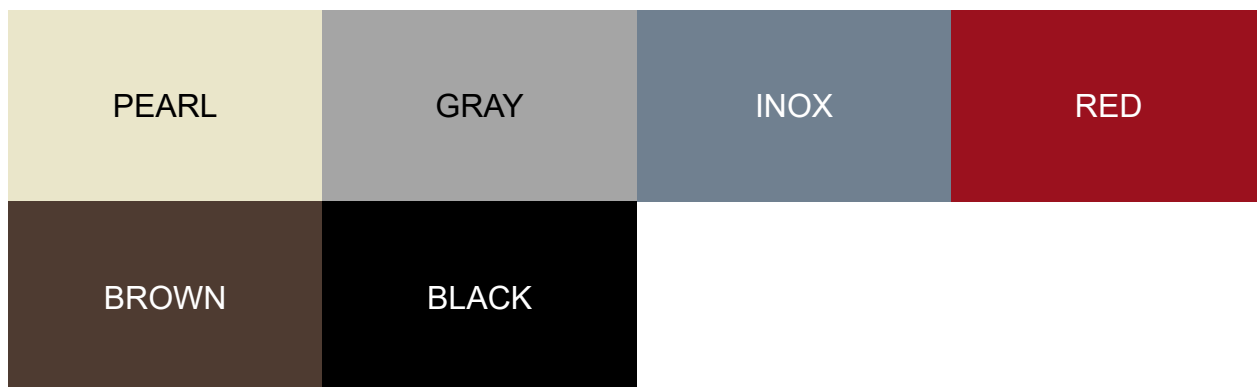


Possibly another RAL shade according to the customer



Model	Panorama 1000 Low
Length (mm)	990
Depth (mm)	735
Height (mm)	850
Display area (m2)	0,42
Temperature (°C)	+4/+8
Power (W)	500
Energy class	D
Refrigerant	R290
Consumption (kWh/24h)	7,8
Voltage (V/Hz)	230/50
Weight (Kg)	145

- Double transparent tempered glass
- LED lighting
- Choice of front decoration panel
- Choice of RAL colour for cover plates
- Ventilated cooling, electronic control unit
- Automatic defrost and evaporation
- Possibility to connect it for remote cooling
- Hinged front glass
- Rear sliding doors
- Castors as option
- Operating conditions of +25 °C and 60 % ambient humidity

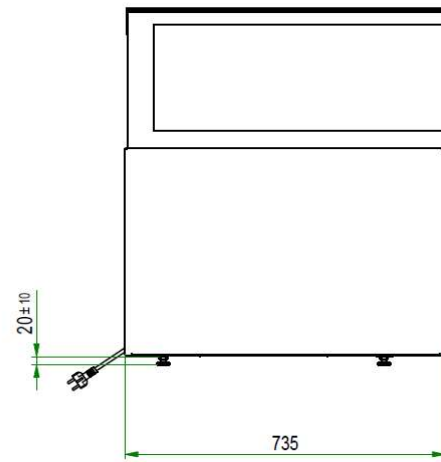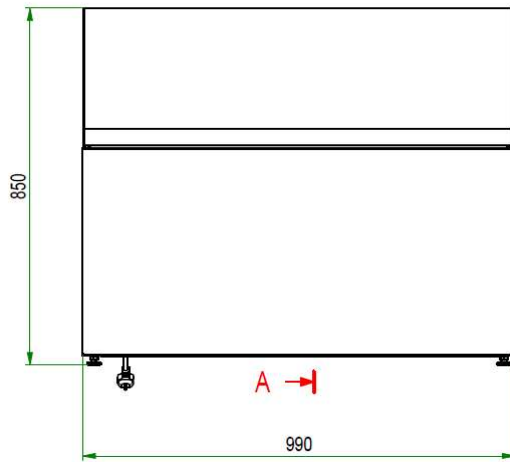

Panorama Middle

Reduced version of standard Panorama. Model of the popular square display case belonging to the family of refrigerated confectionery display cases. This elegant display case is distinguished from the existing CUBE II design by the cleaner lines of the glass top. As standard, the model has a pull-out aggregate, which significantly simplifies the maintenance of the device. Its dimensions and design fit into the CUBE II product line.

- Serve-over
- Transparent double, tempered glasses without color printing on the edges
- Tempered glass shelves
- LED lighting of the exhibition area above each shelf
- Choice of front panel decor
- Choice of RAL design of perimeter sheets
- **Up to 50% electricity savings when using the HEOSONE aggregate***

Technical details:

- Ventilation cooling, electronic control unit
- Voltage 230V/50Hz
- Automatic defrosting and evaporation
- Hinged front glass
- Rear sliding door
- Quick and easy maintenance
- Refrigerant R290

Temperature range:

+4 / +8°C (operating conditions +25°C and 60% ambient humidity)

**Heosone is CAREL's new solution for high-efficiency units that operate on propane with DC inverter rotary compressors. The wide range of modulation is managed by the inverter, which incorporates the unit controller. The inverter is also responsible for driving the electronic expansion valve, as well as the modulating DC fans, without the need for any external modules. Other advantages of using the*

HEOSONE unit include better cooling performance, long service life, high energy efficiency, low noise level.




Specification

	PANORAMA 1000 Middle	PANORAMA 1500 Middle
Dimmensions (mm)	990 x 735 x 1150	1490 x 735 x 1150
Power (W)	*337 / 640	*449 / 842
Display area (m ²)	1,13	1,6
Weight (kg)	192	241


* Heosone aggregate

Color design

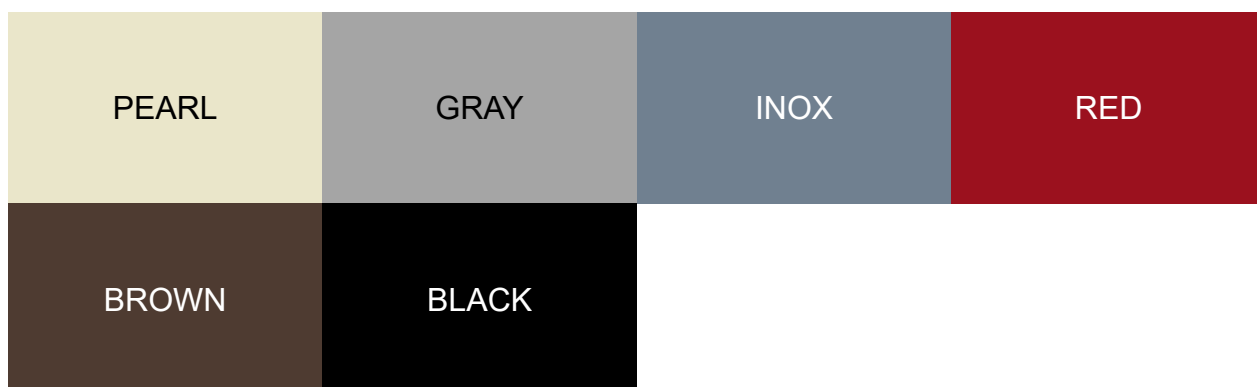



Possibly another RAL shade according to the customer




Model	Panorama 1000 Middle		Panorama 1500 Middle	
Length (mm)	990		1490	
Depth (mm)	735		735	
Height (mm)	1150		1150	
Display area (m2)	1,13		1,6	
Temperature (°C)	+4/+8		+4/+8	
Power (W)	337	640	494	842
Energy class				
Cooler	R290	R290	R290	R290
Consumption (kWh/24h)	3,2	6,56	4,3	8,59
Voltage (V/Hz)	230/50		230/50	
Weight (Kg)	192		241	

- Double transparent tempered glass
- Tempered glass shelves
- LED lighting under each shelf
- Choice of front decoration panel
- Choice of RAL colour for cover plates
- Ventilated cooling, electronic control unit
- Automatic defrost and evaporation
- Possibility to connect it for remote cooling
- Hinged front glass for easy cleaning
- Rear sliding doors
- Castors as option
- Operating conditions of +25 °C and 60 % ambient humidity

The unit with HE0 0 E aggregate

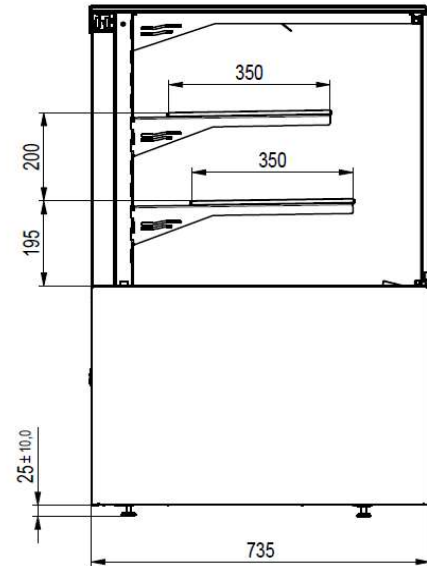
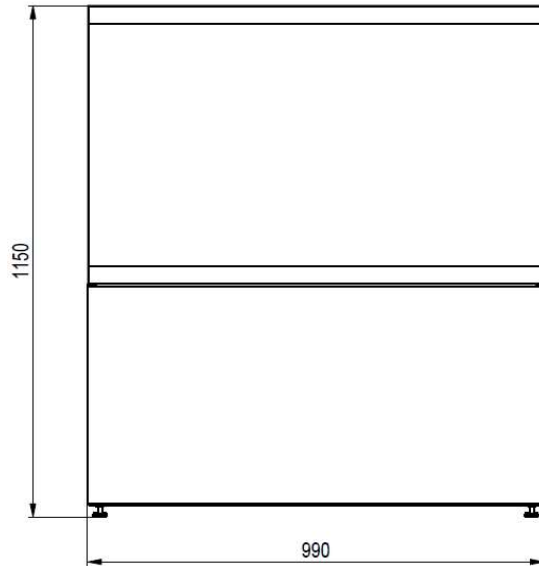




Model	Panorama 1000 Middle		Panorama 1500 Middle	
Length (mm)	990		1490	
Depth (mm)	735		735	
Height (mm)	1150		1150	
Display area (m2)	1,13		1,6	
Temperature (°C)	+4/+8		+4/+8	
Power (W)	337	640	494	842
Energy class				
Cooler	R290	R290	R290	R290
Consumption (kWh/24h)	3,2	6,56	4,3	8,59
Voltage (V/Hz)	230/50		230/50	
Weight (Kg)	192		241	

- Double transparent tempered glass
- Tempered glass shelves
- LED lighting under each shelf
- Choice of front decoration panel
- Choice of RAL colour for cover plates
- Ventilated cooling, electronic control unit
- Automatic defrost and evaporation
- Possibility to connect it for remote cooling
- Hinged front glass for easy cleaning
- Rear sliding doors
- Castors as option
- Operating conditions of +25 °C and 60 % ambient humidity

The unit with HE0 O E aggregate

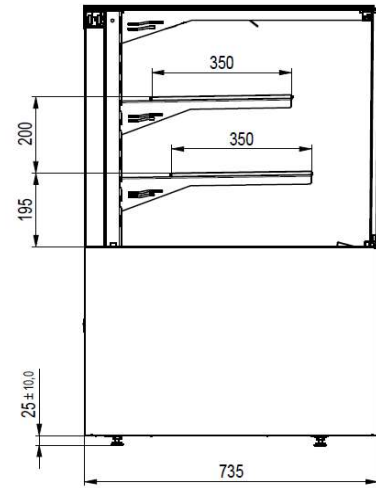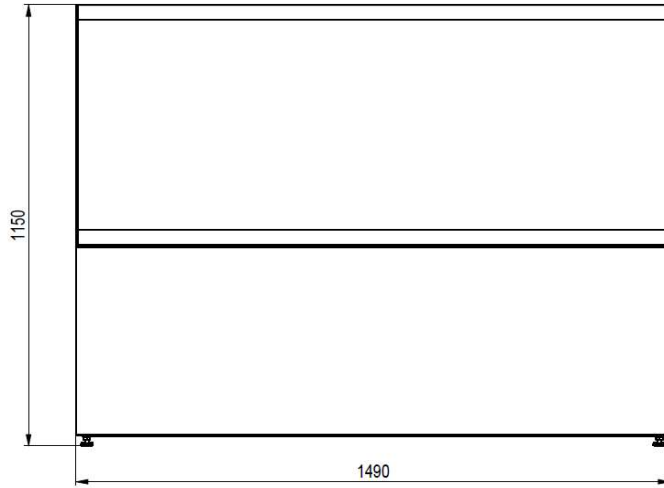

Panorama

Model of the popular square display case belonging to the family of refrigerated confectionery display cases. This elegant display case is distinguished from the existing CUBE II design by the cleaner lines of the glass top. As standard, the model has a pull-out aggregate, which significantly simplifies the maintenance of the device. Its dimensions and design fit into the CUBE II product line.

- Serve-over
- Transparent double, tempered glasses without color printing on the edges
- Tempered glass shelves
- LED lighting of the exhibition area above each shelf
- Choice of front panel decor
- Choice of RAL design of perimeter sheets
- **Up to 50% electricity savings when using the HEOSONE aggregate***

Technical details:

- Ventilation cooling, electronic control unit
- Voltage 230V/50Hz
- Automatic defrosting and evaporation
- Hinged front glass
- Rear sliding door
- Quick and easy maintenance
- Refrigerant R290

Temperature range:

+4 / +8°C (operating conditions +25°C and 60% ambient humidity)

**Heosone is CAREL's new solution for high-efficiency units that operate on propane with DC inverter rotary compressors. The wide range of modulation is managed by the inverter, which incorporates the unit controller. The inverter is also responsible for driving the electronic expansion valve, as well as the modulating DC fans, without the need for any external modules. Other advantages of using the HEOSONE unit include better cooling performance, long service life, high energy efficiency, low noise level.*






Specification

	PANORAMA 600	PANORAMA 1000	PANORAMA 1500
Dimensions (mm)	590 x 735 x 1344	990 x 735 x 1344	1490 x 735 x 1344
Power (W)	153*/415	166*/515	485*/790
Display area (m ²)	0,84	1,46	2,1
Weight (kg)	143	207	259


* Heosone aggregate

Color design

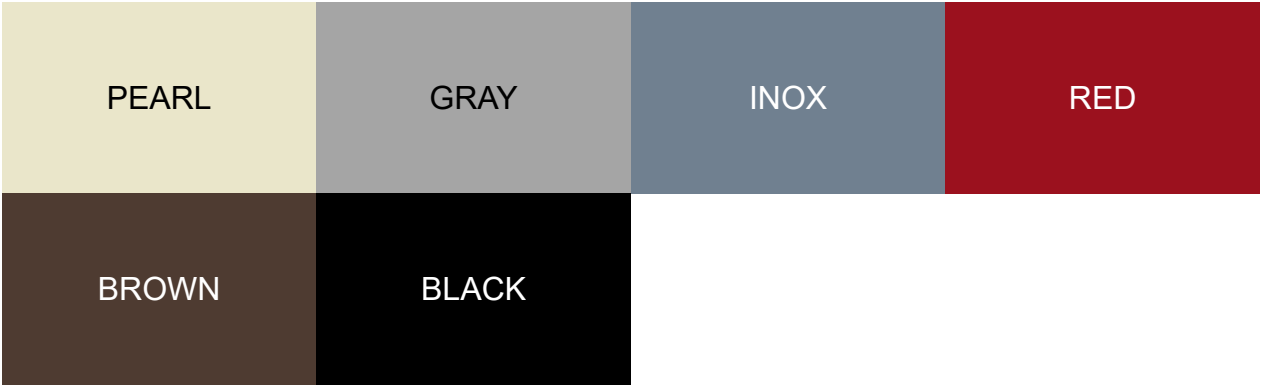



Possibly another RAL shade according to the customer




Model	Panorama 00		Panorama 1000		Panorama 1500	
Length (mm)	590		990		1490	
Depth (mm)	735		735		735	
Height (mm)	1344		1344		1344	
Display area (m2)	0,84		1,46		2,1	
Temperature (°C)	+4/+8		+4/+8		+4/+8	
Power (W)	153	415	166	515	485	790
Energy class						
Refrigerant	R290	R290	R290	R290	R290	R290
Consumption (kWh/24h)	2,29	6,4	2,88	7,17	4,6	12,8
Voltage (V/Hz)	230/50		230/50		230/50	
Weight (Kg)	143		207		259	

- Double transparent tempered glass
- Tempered glass shelves
- LED lighting
- Choice of front decoration panel
- Choice of RAL colour for cover plates
- Ventilated cooling, electronic control unit
- Automatic defrost and evaporation
- Possibility to connect it for remote cooling
- Hinged front glass for easy cleaning
- Rear hinged doors
- Castors as option
- Operating conditions of +25 °C and 60 % ambient humidity

The unit with HE0 0 E aggregate

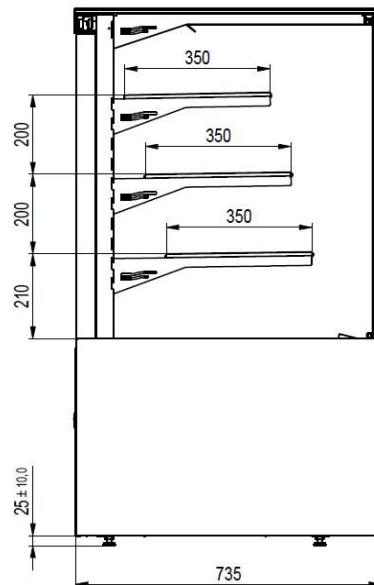
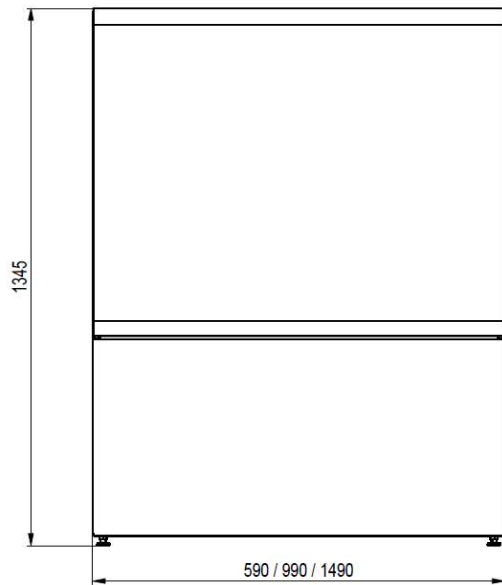





Model	Panorama 00		Panorama 1000		Panorama 1500	
Length (mm)	590		990		1490	
Depth (mm)	735		735		735	
Height (mm)	1344		1344		1344	
Display area (m2)	0,84		1,46		2,1	
Temperature (°C)	+4/+8		+4/+8		+4/+8	
Power (W)	153	415	166	515	485	790
Energy class						
Refrigerant	R290	R290	R290	R290	R290	R290
Consumption (kWh/24h)	2,29	6,4	2,88	7,17	4,6	12,8
Voltage (V/Hz)	230/50		230/50		230/50	
Weight (Kg)	143		207		259	

- Double transparent tempered glass
- Tempered glass shelves
- LED lighting
- Choice of front decoration panel
- Choice of RAL colour for cover plates
- Ventilated cooling, electronic control unit
- Automatic defrost and evaporation
- Possibility to connect it for remote cooling
- Hinged front glass for easy cleaning
- Rear sliding doors
- Castors as option
- Operating conditions of +25 °C and 60 % ambient humidity

The unit with HE0 0 E aggregate

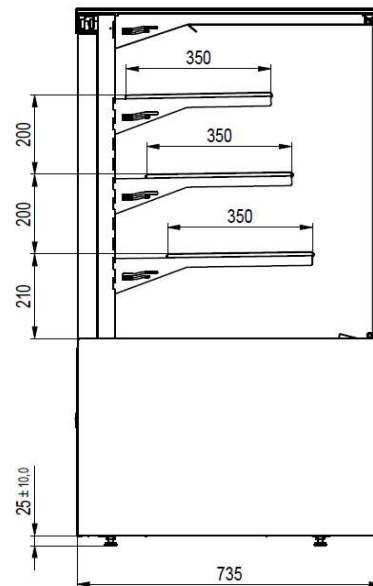
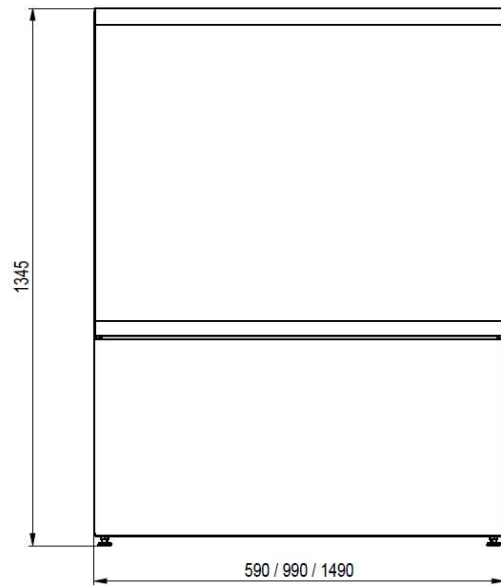




Model	Panorama 00		Panorama 1000		Panorama 1500	
Length (mm)	590		990		1490	
Depth (mm)	735		735		735	
Height (mm)	1344		1344		1344	
Display area (m2)	0,84		1,46		2,1	
Temperature (°C)	+4/+8		+4/+8		+4/+8	
Power (W)	153	415	166	515	485	790
Energy class						
Refrigerant	R290	R290	R290	R290	R290	R290
Consumption (kWh/24h)	2,29	6,4	2,88	7,17	4,6	12,8
Voltage (V/Hz)	230/50		230/50		230/50	
Weight (Kg)	143		207		259	

- Double transparent tempered glass
- Tempered glass shelves
- LED lighting
- Choice of front decoration panel
- Choice of RAL colour for cover plates
- Ventilated cooling, electronic control unit
- Automatic defrost and evaporation
- Possibility to connect it for remote cooling
- Hinged front glass for easy cleaning
- Rear sliding doors
- Castors as option
- Operating conditions of +25 °C and 60 % ambient humidity

The unit with HE0 0 E aggregate

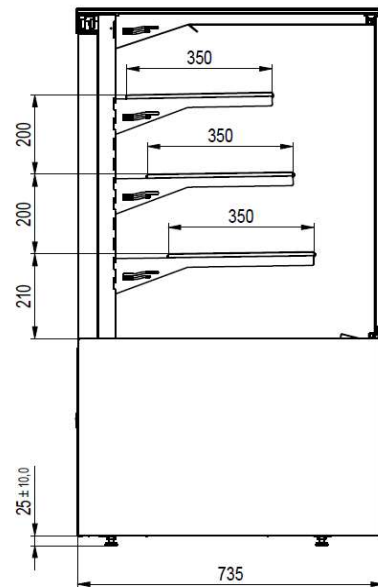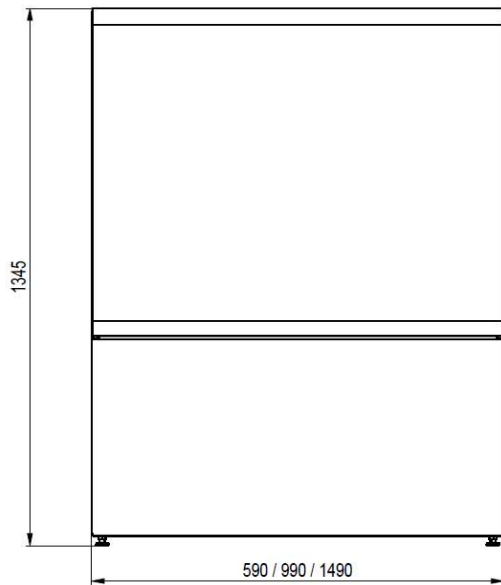

Panorama Self-service

Model of the popular square display case belonging to the family of refrigerated confectionery display cases. This elegant display case is distinguished from the existing CUBE II design by the cleaner lines of the glass top. As standard, the model has a pull-out aggregate, which significantly simplifies the maintenance of the device. Its dimensions and design fit into the CUBE II product line.

- Self-service
- Transparent double, tempered glasses without color printing on the edges
- Tempered glass shelves
- LED lighting of the exhibition area above each shelf
- Choice of front panel decor
- Choice of RAL design of perimeter sheets
- **Up to 50% electricity savings when using the HEOSONE aggregate***

Technical details:

- Ventilation cooling, electronic control unit
- Voltage 230V/50Hz
- Automatic defrosting and evaporation
- Front & rear sliding door
- Quick and easy maintenance
- Refrigerant R290

Temperature range:

+4 / +8°C (operating conditions +25°C and 60% ambient humidity)

**Heosone is CAREL's new solution for high-efficiency units that operate on propane with DC inverter rotary compressors. The wide range of modulation is managed by the inverter, which incorporates the unit controller. The inverter is also responsible for driving the electronic expansion valve, as well as the modulating DC fans, without the need for any external modules. Other advantages of using the HEOSONE unit include better cooling performance, long service life, high energy efficiency, low noise level.*



Specification

	PANORAMA 600	PANORAMA 1000	PANORAMA 1500
Dimensions (mm)	590 x 735 x 1344	990 x 735 x 1344	1490 x 735 x 1344
Power (W)	153*/415	166*/515	485*/790
Display area (m ²)	0,84	1,46	2,1
Weight (kg)	143	207	259


* Heosone aggregate

Color design

PEARL	GRAY	INOX	RED
BROWN	BLACK		



Possibly another RAL shade according to the customer




Model	Panorama 00		Panorama 1000		Panorama 1500	
Length (mm)	590		990		1490	
Depth (mm)	735		735		735	
Height (mm)	1344		1344		1344	
Display area (m2)	0,84		1,46		2,1	
Temperature (°C)	+4/+8		+4/+8		+4/+8	
Power (W)	153	415	166	515	485	790
Energy class						
Refrigerant	R290	R290	R290	R290	R290	R290
Consumption (kWh/24h)	2,29	6,4	2,88	7,17	4,6	12,8
Voltage (V/Hz)	230/50		230/50		230/50	
Weight (Kg)	143		207		259	

- Double transparent tempered glass
- Tempered glass shelves
- LED lighting
- Choice of front decoration panel
- Choice of RAL colour for cover plates
- Ventilated cooling, electronic control unit
- Automatic defrost and evaporation
- Possibility to connect it for remote cooling
- Hinged front glass for easy cleaning
- Rear hinged doors
- Castors as option
- Operating conditions of +25 °C and 60 % ambient humidity

The unit with HE0 0 E aggregate

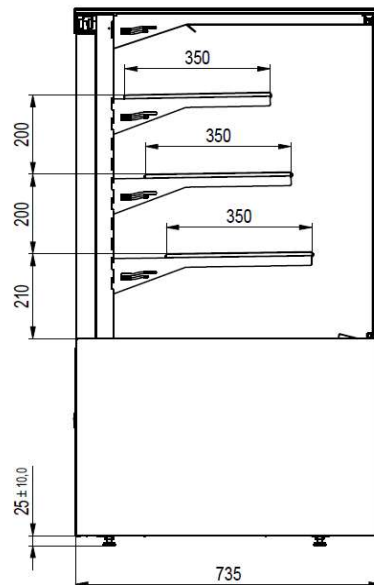
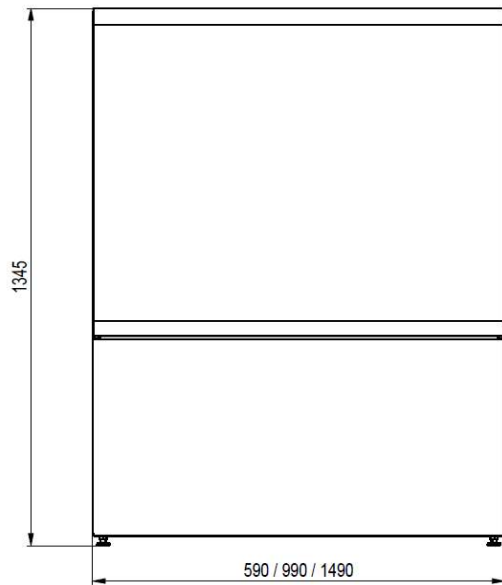





Model	Panorama 00		Panorama 1000		Panorama 1500	
Length (mm)	590		990		1490	
Depth (mm)	735		735		735	
Height (mm)	1344		1344		1344	
Display area (m2)	0,84		1,46		2,1	
Temperature (°C)	+4/+8		+4/+8		+4/+8	
Power (W)	153	415	166	515	485	790
Energy class						
Refrigerant	R290	R290	R290	R290	R290	R290
Consumption (kWh/24h)	2,29	6,4	2,88	7,17	4,6	12,8
Voltage (V/Hz)	230/50		230/50		230/50	
Weight (Kg)	143		207		259	

- Double transparent tempered glass
- Tempered glass shelves
- LED lighting
- Choice of front decoration panel
- Choice of RAL colour for cover plates
- Ventilated cooling, electronic control unit
- Automatic defrost and evaporation
- Possibility to connect it for remote cooling
- Hinged front glass for easy cleaning
- Rear sliding doors
- Castors as option
- Operating conditions of +25 °C and 60 % ambient humidity

The unit with HE0 0 E aggregate

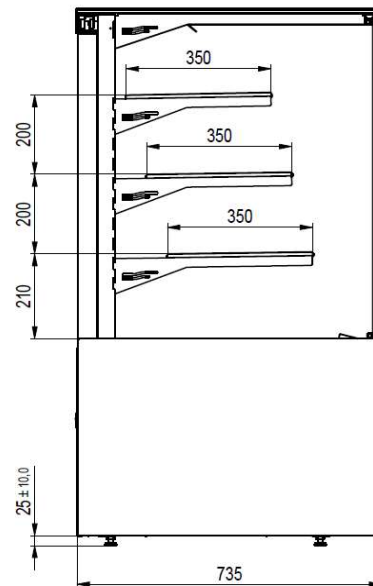
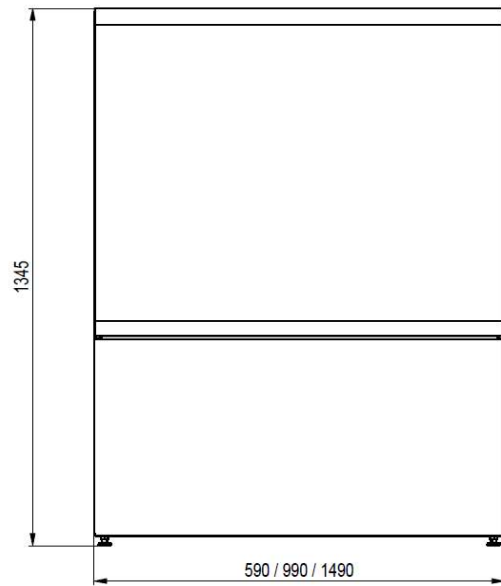




Model	Panorama 00		Panorama 1000		Panorama 1500	
Length (mm)	590		990		1490	
Depth (mm)	735		735		735	
Height (mm)	1344		1344		1344	
Display area (m2)	0,84		1,46		2,1	
Temperature (°C)	+4/+8		+4/+8		+4/+8	
Power (W)	153	415	166	515	485	790
Energy class						
Refrigerant	R290	R290	R290	R290	R290	R290
Consumption (kWh/24h)	2,29	6,4	2,88	7,17	4,6	12,8
Voltage (V/Hz)	230/50		230/50		230/50	
Weight (Kg)	143		207		259	

- Double transparent tempered glass
- Tempered glass shelves
- LED lighting
- Choice of front decoration panel
- Choice of RAL colour for cover plates
- Ventilated cooling, electronic control unit
- Automatic defrost and evaporation
- Possibility to connect it for remote cooling
- Hinged front glass for easy cleaning
- Rear sliding doors
- Castors as option
- Operating conditions of +25 °C and 60 % ambient humidity

The unit with HE0 0 E aggregate

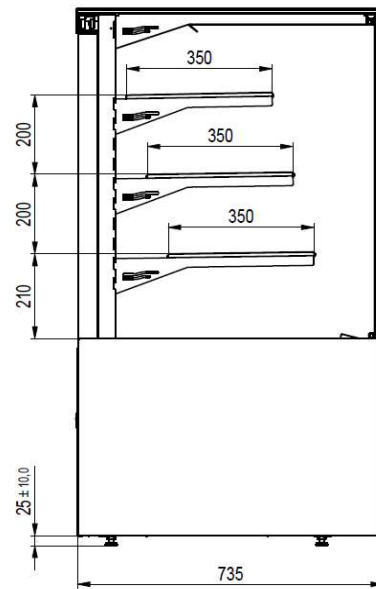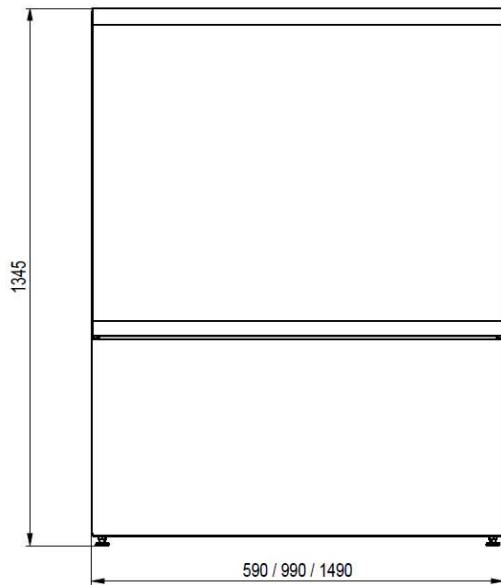

Panorama High

Model of the popular square display case belonging to the family of refrigerated confectionery display cases. This elegant display case is distinguished from the existing CUBE II design by the cleaner lines of the glass top. As standard, the model has a pull-out aggregate, which significantly simplifies the maintenance of the device. Its dimensions and design fit into the CUBE II product line.

- Serve-over
- Transparent double, tempered glasses without color printing on the edges
- Tempered glass shelves
- LED lighting of the exhibition area above each shelf
- Choice of front panel decor
- Choice of RAL design of perimeter sheets
- **Up to 50% electricity savings thanks to the HEOSONE aggregate***

Technical details:

- Ventilation cooling, electronic control unit
- Voltage 230V/50Hz
- Automatic defrosting and evaporation
- Hinged front glass
- Rear sliding door
- Quick and easy maintenance
- Refrigerant R290

Temperature range:

+4 / +8°C (operating conditions +25°C and 60% ambient humidity)







**Heosone is CAREL's new solution for high-efficiency units that operate on propane with DC inverter rotary compressors. The wide range of modulation is managed by the inverter, which incorporates the unit controller. The inverter is also responsible for driving the electronic expansion valve, as well as the modulating DC fans, without the need for any external modules. Other advantages of using the HEOSONE unit include better cooling performance, long service life, high energy efficiency, low noise level.*

Specification

	PANORAMA HIGH 600	PANORAMA HIGH 1000	PANORAMA HIGH 1500
Dimensions (mm)	590 x 735 x 1544	990 x 735 x 1544	1490 x 735 x 1544
Power (W)	160	180	506
Display area (m ²)	0,84	1,46	2,1
Weight (kg)	151	219	264

* Heosone aggregate

Color design

PEARL	GRAY	INOX	RED
BROWN	BLACK		


Possibly another RAL shade according to the customer




Model	Panorama 00 i	Panorama 1000 i	Panorama 1500 i
Length (mm)	590	990	1490
Depth (mm)	735	735	735
Height (mm)	1544	1544	1544
Display area (m2)	0,84	1,46	2,1
Temperature (°C)	+4/+8	+4/+8	+4/+8
Power (W)	160	180	506
Energy class			
Cooler	R290	R290	R290
Consumption (kWh/24h)	2,6	3,6	4,78
Voltage (V/Hz)	230/50	230/50	230/50
Weight (Kg)	151	219	264

- Double transparent tempered glass
- Tempered glass shelves
- LED lighting under each shelf
- Choice of front decoration panel
- Choice of RAL colour for cover plates
- Ventilated cooling, electronic control unit
- Automatic defrost and evaporation
- Possibility to connect it for remote cooling
- Hinged front glass for easy cleaning
- Rear hinged doors
- Castors as option
- HEO one aggregate
- Operating conditions of +25 °C and 60 % ambient humidity

a) 3 shelves

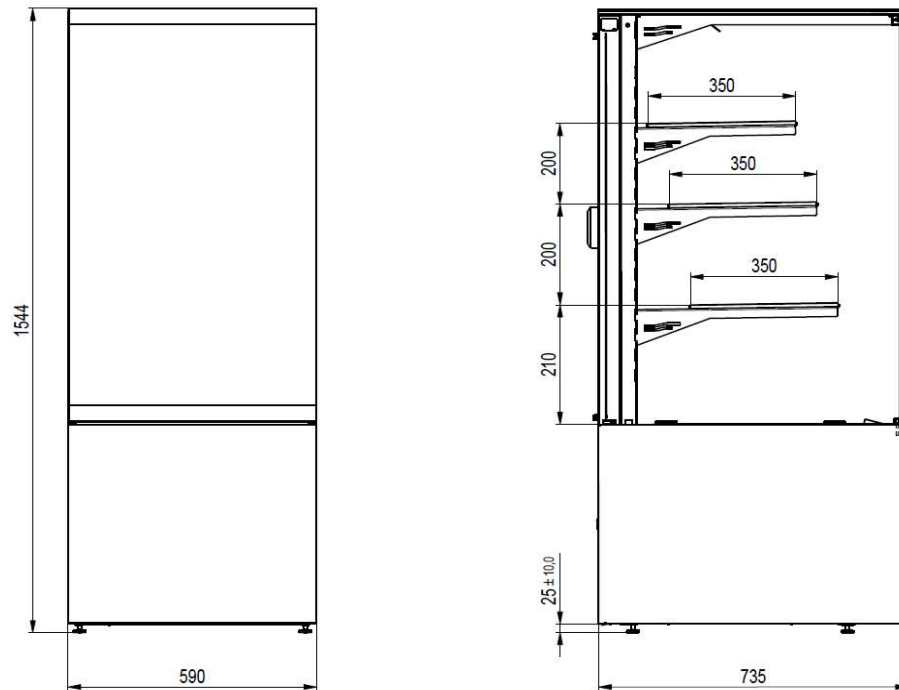


a) 4 shelves

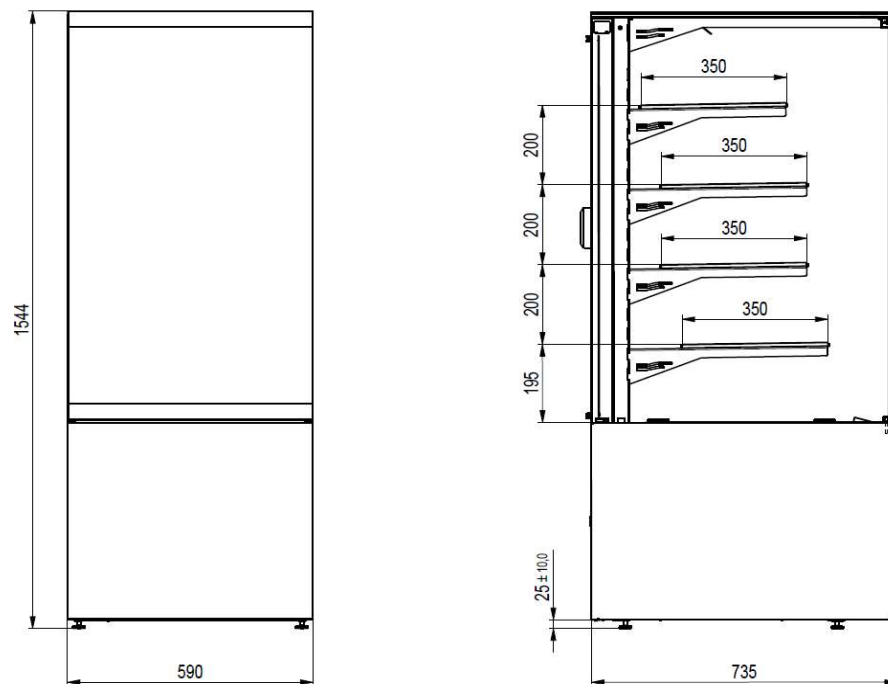




Model	Panorama 00 i	Panorama 1000 i	Panorama 1500 i
Length (mm)	590	990	1490
Depth (mm)	735	735	735
Height (mm)	1544	1544	1544
Display area (m2)	0,84	1,46	2,1
Temperature (°C)	+4/+8	+4/+8	+4/+8
Power (W)	160	180	506
Energy class			
Cooler	R290	R290	R290
Consumption (kWh/24h)	2,6	3,6	4,78
Voltage (V/Hz)	230/50	230/50	230/50
Weight (Kg)	151	219	264

- Double transparent tempered glass
- Tempered glass shelves
- LED lighting under each shelf
- Choice of front decoration panel
- Choice of RAL colour for cover plates
- Ventilated cooling, electronic control unit
- Automatic defrost and evaporation
- Possibility to connect it for remote cooling
- Hinged front glass for easy cleaning
- Rear sliding doors
- Castors as option
- HEO one aggregate
- Operating conditions of +25 °C and 60 % ambient humidity

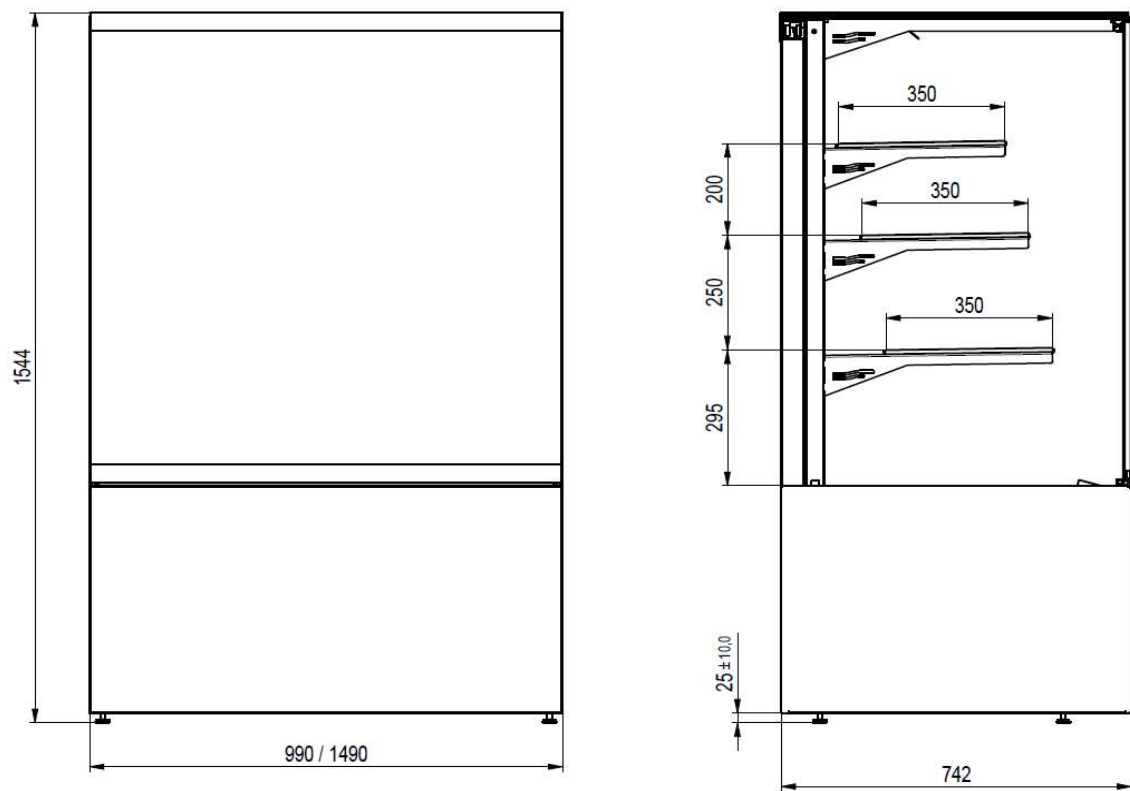


4 shelves

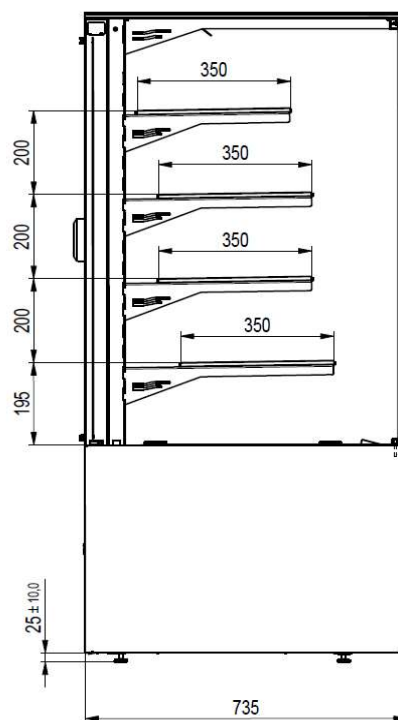




Model	Panorama 00 i	Panorama 1000 i	Panorama 1500 i
Length (mm)	590	990	1490
Depth (mm)	735	735	735
Height (mm)	1544	1544	1544
Display area (m2)	0,84	1,46	2,1
Temperature (°C)	+4/+8	+4/+8	+4/+8
Power (W)	160	180	506
Energy class			
Cooler	R290	R290	R290
Consumption (kWh/24h)	2,6	3,6	4,78
Voltage (V/Hz)	230/50	230/50	230/50
Weight (Kg)	151	219	264

- Double transparent tempered glass
- Tempered glass shelves
- LED lighting under each shelf
- Choice of front decoration panel
- Choice of RAL colour for cover plates
- Ventilated cooling, electronic control unit
- Automatic defrost and evaporation
- Possibility to connect it for remote cooling
- Hinged front glass for easy cleaning
- Rear sliding doors
- Castors as option
- HEO one aggregate
- Operating conditions of +25 °C and 60 % ambient humidity

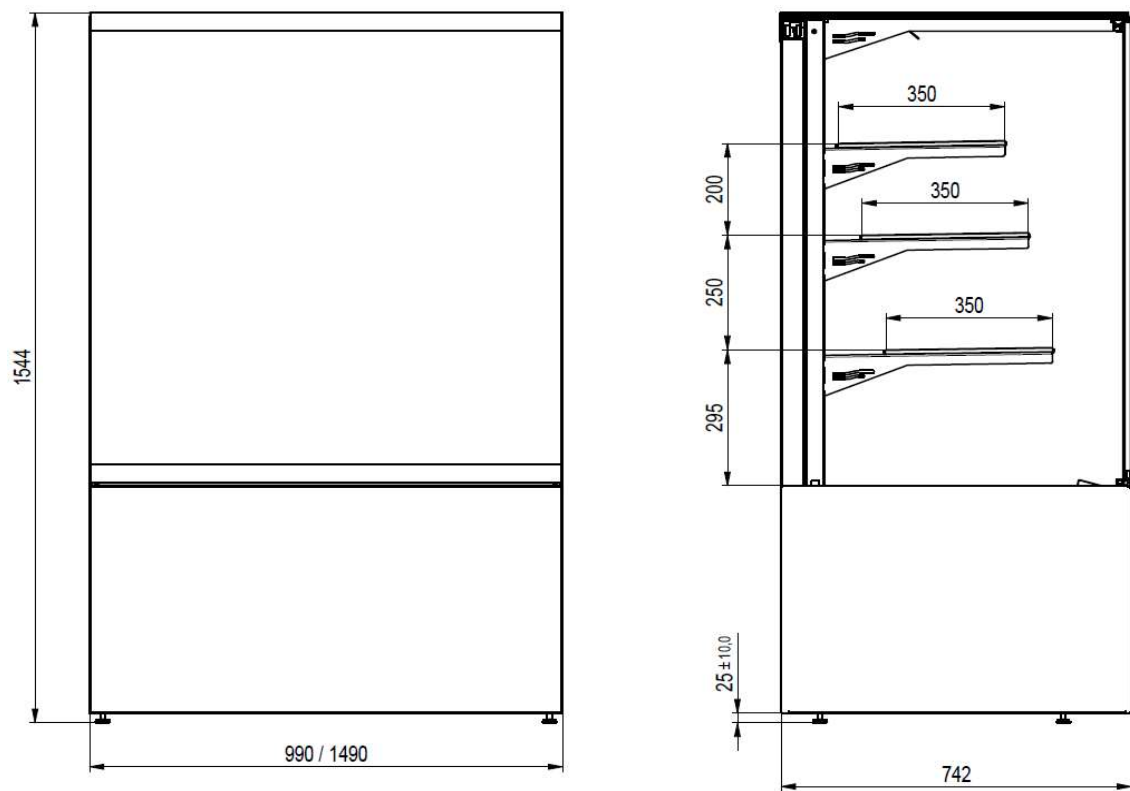

4 shelves

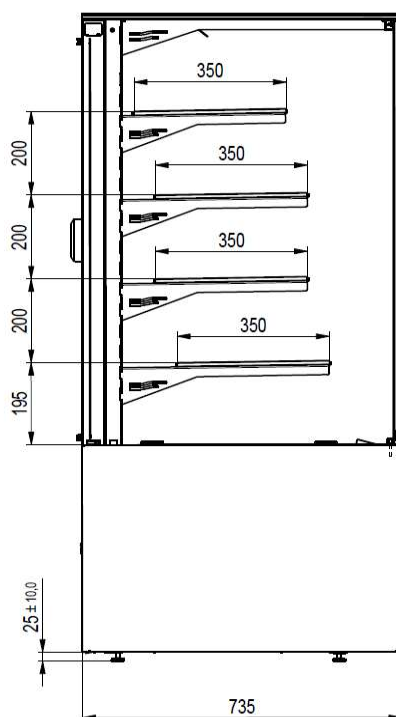

Panorama High Self-service

Model of the popular square display case belonging to the family of refrigerated confectionery display cases. This elegant display case is distinguished from the existing CUBE II design by the cleaner lines of the glass top. As standard, the model has a pull-out aggregate, which significantly simplifies the maintenance of the device. Its dimensions and design fit into the CUBE II product line.

- Self-service
- Transparent double, tempered glasses without color printing on the edges
- Tempered glass shelves
- LED lighting of the exhibition area above each shelf
- Choice of front panel decor
- Choice of RAL design of perimeter sheets
- **Up to 50% electricity savings thanks to the HEOSONE aggregate***

Technical details:

- Ventilation cooling, electronic control unit
- Voltage 230V/50Hz
- Automatic defrosting and evaporation
- Front & rear sliding doors
- Quick and easy maintenance
- Refrigerant R290

Temperature range:

+4 / +8°C (operating conditions +25°C and 60% ambient humidity)





**Heosone is CAREL's new solution for high-efficiency units that operate on propane with DC inverter rotary compressors. The wide range of modulation is managed by the inverter, which incorporates the unit controller. The inverter is also responsible for driving the electronic expansion valve, as well as the modulating DC fans, without the need for any external modules. Other advantages of using the HEOSONE unit include better cooling performance, long service life, high energy efficiency, low noise level.*

Specification

	PANORAMA HIGH 1000	PANORAMA HIGH 1500
Dimensions (mm)	990 x 735 x 1544	1490 x 735 x 1544
Power (W)	180	506
Display area (m ²)	1,46	2,1
Weight (kg)	219	264

* Heosone aggregate

Color design


PEARL	GRAY	INOX	RED
BROWN	BLACK		

Possibly another RAL shade according to the customer




Model	Panorama 1000 i el er i e	Panorama 1500 i el er i e
Length (mm)	990	1490
Depth (mm)	735	735
Height (mm)	1544	1544
Display area (m2)	1,46	2,1
Temperature (°C)	+4/+8	+4/+8
Power (W)	180	506
Energy class		
Cooler	R290	R290
Consumption (kWh/24h)	3,6	4,78
Voltage (V/Hz)	230/50	230/50
Weight (Kg)	219	264

- Double transparent tempered glass
- Tempered glass shelves
- LED lighting under each shelf
- Choice of front decoration panel
- Choice of RAL colour for cover plates
- Ventilated cooling, electronic control unit
- Automatic defrost and evaporation
- Possibility to connect it for remote cooling
- front rear sliding doors
- Castors as option
- HEO one aggregate
- Operating conditions of +25 °C and 60 % ambient humidity

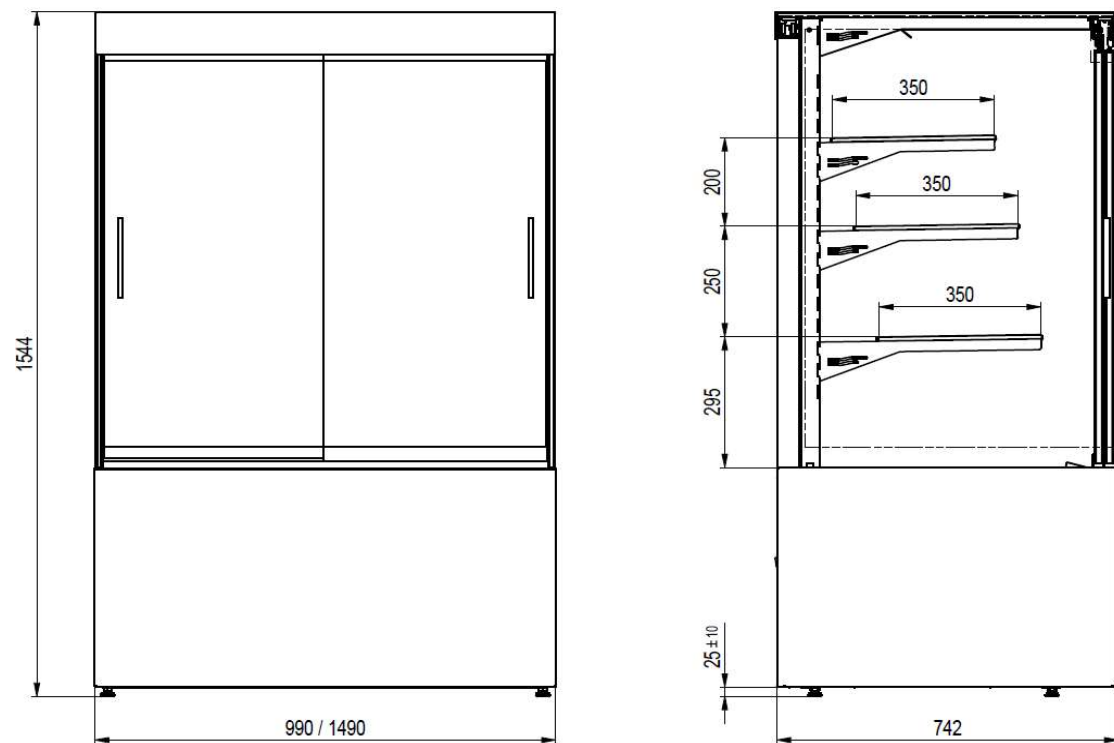


4 shelves

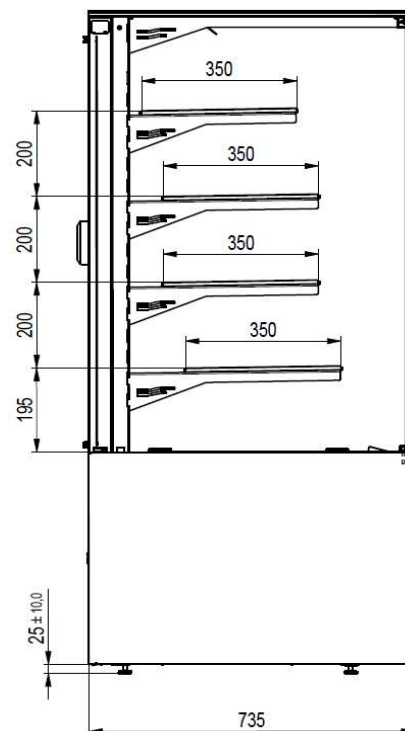




Model	Panorama 1000 i el er i e	Panorama 1500 i el er i e
Length (mm)	990	1490
Depth (mm)	735	735
Height (mm)	1544	1544
Display area (m2)	1,46	2,1
Temperature (°C)	+4/+8	+4/+8
Power (W)	180	506
Energy class		
Cooler	R290	R290
Consumption (kWh/24h)	3,6	4,78
Voltage (V/Hz)	230/50	230/50
Weight (Kg)	219	264

- Double transparent tempered glass
- Tempered glass shelves
- LED lighting under each shelf
- Choice of front decoration panel
- Choice of RAL colour for cover plates
- Ventilated cooling, electronic control unit
- Automatic defrost and evaporation
- Possibility to connect it for remote cooling
- front rear sliding doors
- Castors as option
- HEO one aggregate
- Operating conditions of +25 °C and 60 % ambient humidity

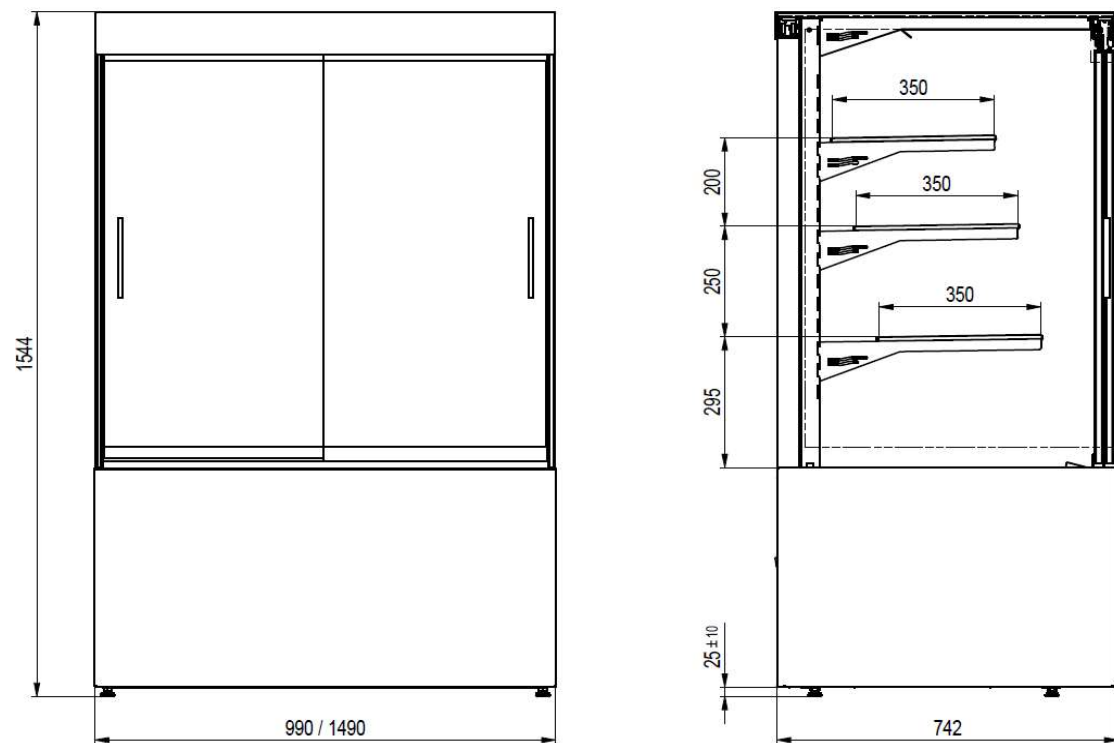

4 shelves

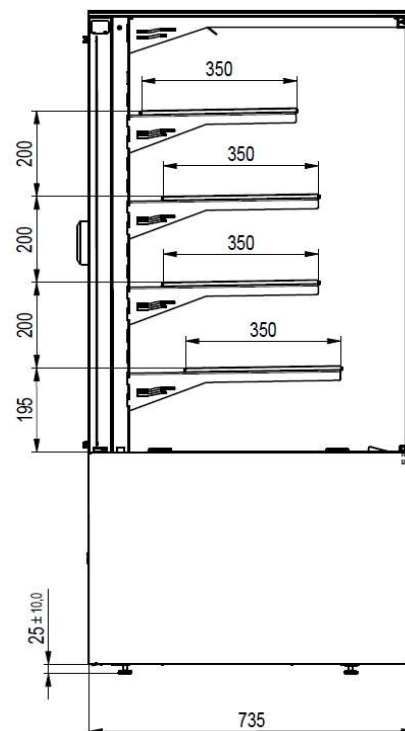



Panorama Showcase

Let your products stand out, let them light up the entire space. LED lighting of each shelf. No extraneous elements that disrupt your presentation. Purity, precision, quality. These are the Panorama showcases.

Main Features

Purity from every angle

Front and side double glass are perfectly transparent and allow maximum visibility goods from every angle without distracting elements.

2 variants of ventilation cooling

Built-in unit for R290 (standard) or CAREL Heosone controls. Possibility of connection to central cooling or as a neutral display case.



4 height variants

- High
- Normal
- Middle
- Low

LED lighting

Perfect visibility thanks to the lighting of every shelf. Exhibited products are therefore evenly illuminated without any unwanted shadows.


4 levels of sales

Three shelves in the basic equipment. For the High variant, it is possible to add the 4th shelf individually. The possibility of combining into sets (using triple glass).

Panorama

Service or self-service

Customize your showcase to suit your business needs. In the self-service version, the windshield consists of a **self-closing door** with smooth operation and minimal opening resistance.

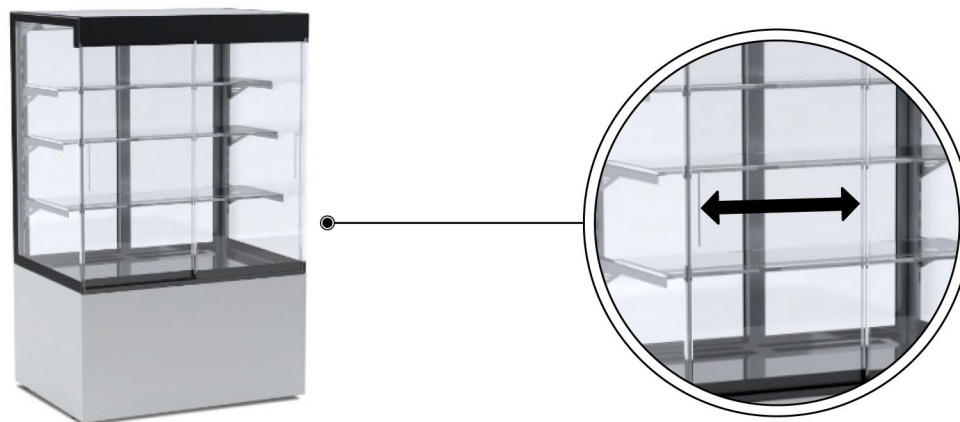

The self-service version is available in lengths of **1000** and **1500 mm** and heights of **1344** and **1544 mm**.



Normal 1500



High 1000



Normal 1000

Panorama

Fully pull-out aggregate

Two variants of **built-in cooling system** give you the opportunity to customize the showcase exactly according to your needs. Choose between a standard **R290** unit or a **Carel Heosone** unit for even greater **energy savings (up to 50%)**. Both variants have a **fully pull-out** aggregate for easier maintenance and service.

Heosone is CAREL's solution for high-efficiency units that operate on propane with DC inverter rotary compressors. **The wide range of modulation** is managed by the inverter, which incorporates the unit controller. The inverter is also responsible for driving the electronic expansion valve, as well as the modulating DC fans, **without the need for any external modules**. Other advantages of using the HEOSONE unit include **better cooling performance, long service life, high energy efficiency, low noise level**.





Fully pull-out aggregate



Technical specifications

Panorama Low

- Double transparent tempered glass
- **LED lighting** of the exhibition area
- Choice of front decoration panel
- Choice of **RAL colour** for cover plates
- Ventilation cooling, electronic control unit
- Automatic defrost and evaporation
- Possibility to connect it for remote cooling
- Back **sliding door**
- Hinged front glass for easier cleaning
- Castors as option
- Operating conditions **+25°C/ 60% ambient humidity**

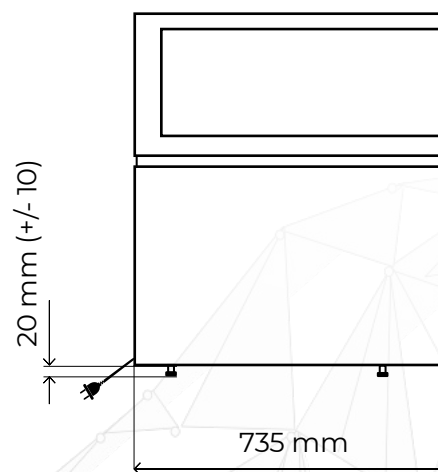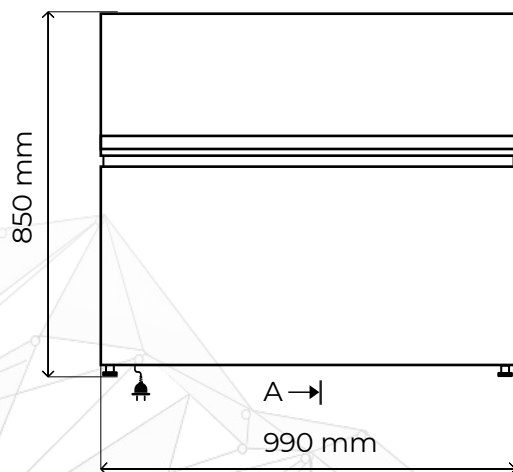


Model	Panorama 1000 Low
Length (mm)	990
Depth (mm)	735
Height (mm)	850
Display area (m2)	0,42
Temperature (°C)	+4/ +8
Power (W)	500
Energy class	D
Refrigerant	R290
Consumption (kWh/ 24h)	7,8
Voltage (V/ Hz)	230/ 50
Weight (Kg)	145

Technical specifications

Panorama Middle

- Double transparent tempered glass
- Tempered glass shelves
- **LED lighting** of the exhibition area
- Choice of front decoration panel
- Choice of **RAL colour** for cover plates
- Ventilation cooling, electronic control unit
- Automatic defrost and evaporation
- Possibility to connect it for remote cooling
- Back **sliding door**
- Hinged front glass for easier cleaning
- Castors as option
- Operating conditions **+25°C/ 60% ambient humidity**

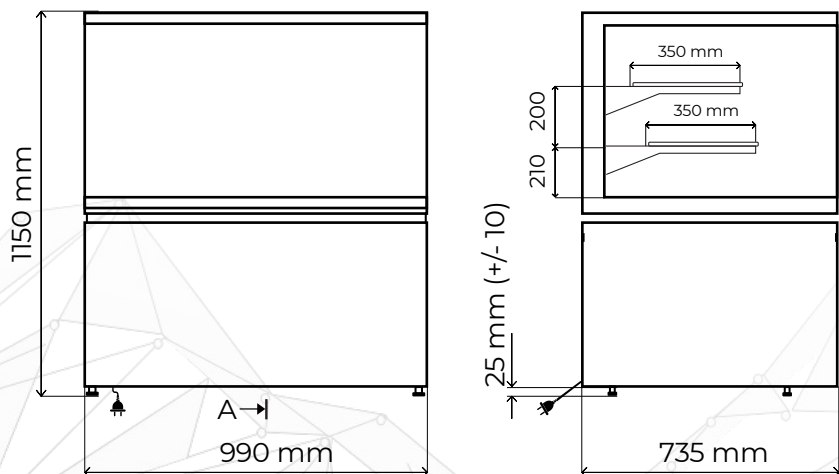

Model	Panorama 1000 Middle		Panorama 1500 Middle	
Length (mm)	990		1490	
Depth (mm)	735		735	
Height (mm)	1150		1150	
Display area (m2)	1,13		1,6	
Temperature (°C)	+4/ +8		+4/ +8	
Power (W)	*337	640	*494	842
Energy class	C	F	C	F
Refrigerant	R290	R290	R290	R290
Consumption (kWh/ 24h)	3,2	6,56	4,3	8,59
Voltage (V/ Hz)	230/ 50		230/ 50	
Weight (Kg)	192		241	


* aggregate HEOSONE

Technical specifications

Panorama Normal

- Double transparent tempered glass
- Tempered glass shelves
- **LED lighting** of the exhibition area
- Choice of front decoration panel
- Choice of **RAL colour** for cover plates
- Ventilation cooling, electronic control unit
- Automatic defrost and evaporation
- Possibility to connect it for remote cooling
- Back **sliding door**
- Hinged front glass for easier cleaning
- Castors as option
- Operating conditions **+25°C/ 60% ambient humidity**

Also in self-service version

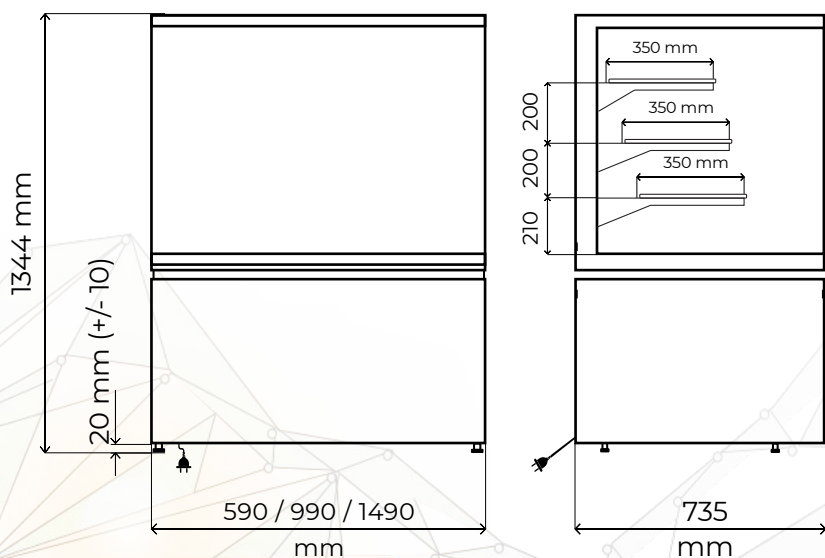

Model	Panorama 600		Panorama 1000		Panorama 1500	
Length (mm)	590		990		1490	
Depth (mm)	735		735		735	
Height (mm)	1344		1344		1344	
Display area (m2)	0,84		1,46		2,1	
Temperature (°C)	+4 / +8		+4 / +8		+4 / +8	
Power (W)	*153	415	*166	515	*485	790
Energy class	C		C		C	
Refrigerant	R290		R290		R290	
Consumption (kWh/ 24h)	*2,29		*2,88		*4,6	
Voltage (V/ Hz)	230/50		230/50		230/50	
Weight (Kg)	143		207		259	

* aggregate HEOSONE


Technical specifications

Panorama High

- Double transparent tempered glass
- Tempered glass shelves
- **LED lighting** of the exhibition area
- Choice of front decoration panel
- Choice of **RAL colour** for cover plates
- Ventilation cooling, electronic control unit
- Automatic defrost and evaporation
- Possibility to connect it for remote cooling
- Back **sliding door**
- Hinged front glass for easier cleaning
- Castors as option
- Operating conditions **+25°C/ 60% ambient humidity**

Version with extra shelf

Also in self-service version

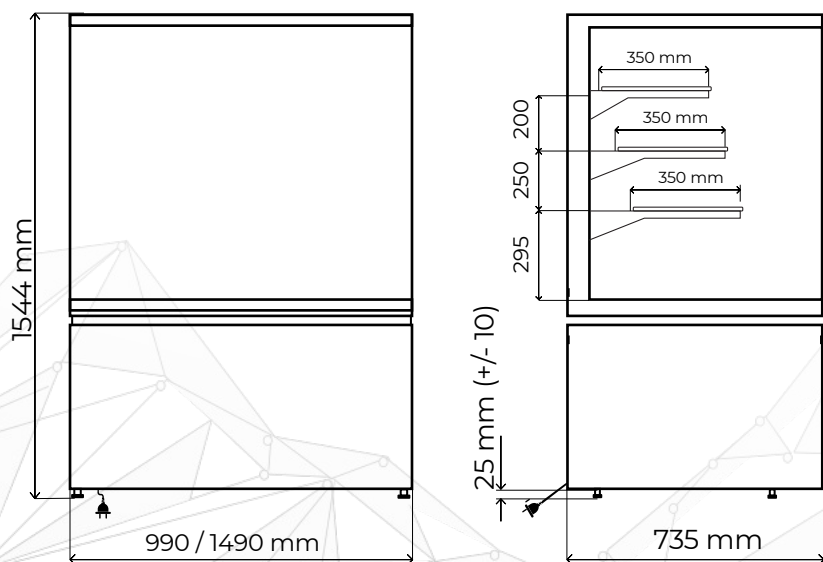

Model	Panorama 600 High		Panorama 1000 High	Panorama 1500 High
Length (mm)	590		990	1490
Depth (mm)	735		735	735
Height (mm)	1544		1544	1544
Display area (m2)	0,84		1,46	2,1
Temperature (°C)	+4 / +8		+4 / +8	+4 / +8
Power (W)	*160	512	180	506
Energy class	C		C	C
Refrigerant	R290	R290	R290	R290
Consumption (kWh/ 24h)	*2,6	7,3	3,6	4,78
Voltage (V/ Hz)	230/50		230/50	230/50
Weight (Kg)	151		219	264

* aggregate HEOSONE



По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04 Ангарск (3955)60-70-56 Архангельск (8182)63-90-72 Астрахань (8512)99-46-04 Барнаул (3852)73-04-60 Белгород (4722)40-23-64 Благовещенск (4162)22-76-07 Брянск (4832)59-03-52 Владивосток (423)249-28-31 Владикавказ (8672)28-90-48 Владимир (4922)49-43-18 Волгоград (844)278-03-48 Вологда (8172)26-41-59 Воронеж (473)204-51-73 Екатеринбург (343)384-55-89	Иваново (4932)77-34-06 Ижевск (3412)26-03-58 Иркутск (395)279-98-46 Казань (843)206-01-48 Калининград (4012)72-03-81 Калуга (4842)92-23-67 Кемерово (3842)65-04-62 Киров (8332)68-02-04 Коломна (4966)23-41-49 Кострома (4942)77-07-48 Краснодар (861)203-40-90 Красноярск (391)204-63-61 Курск (4712)77-13-04 Курган (3522)50-90-47 Липецк (4742)52-20-81	Магнитогорск (3519)55-03-13 Москва (495)268-04-70 Мурманск (8152)59-64-93 Набережные Челны (8552)20-53-41 Нижний Новгород (831)429-08-12 Новокузнецк (3843)20-46-81 Ноябрьск (3496)41-32-12 Новосибирск (383)227-86-73 Омск (3812)21-46-40 Орел (4862)44-53-42 Оренбург (3532)37-68-04 Пенза (8412)22-31-16 Петрозаводск (8142)55-98-37 Псков (8112)59-10-37 Пермь (342)205-81-47	Ростов-на-Дону (863)308-18-15 Рязань (4912)46-61-64 Самара (846)206-03-16 Санкт-Петербург (812)309-46-40 Саратов (845)249-38-78 Севастополь (8692)22-31-93 Саранск (8342)22-96-24 Симферополь (3652)67-13-56 Смоленск (4812)29-41-54 Сочи (862)225-72-31 Ставрополь (8652)20-65-13 Сургут (3462)77-98-35 Сыктывкар (8212)25-95-17 Тамбов (4752)50-40-97 Тверь (4822)63-31-35	Тольятти (8482)63-91-07 Томск (3822)98-41-53 Тула (4872)33-79-87 Тюмень (3452)66-21-18 Ульяновск (8422)24-23-59 Улан-Удэ (3012)59-97-51 Уфа (347)229-48-12 Хабаровск (4212)92-98-04 Чебоксары (8352)28-53-07 Челябинск (351)202-03-61 Череповец (8202)49-02-64 Чита (3022)38-34-83 Якутск (4112)23-90-97 Ярославль (4852)69-52-93
Россия +7(495)268-04-70	Казахстан +7(727)345-47-04	Беларусь +(375)257-127-884	Узбекистан +998(71)205-18-59	Киргизия +996(312)96-26-47

эл.почта: usi@nt-rt.ru || сайт: <https://unis.nt-rt.ru/>